



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>C23C 16/26, H01M 8/10, B05D 5/12</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/13128</b> <b>(43) International Publication Date:</b> 18 March 1999 (18.03.99)
<b>(21) International Application Number:</b> PCT/US98/18938 <b>(22) International Filing Date:</b> 11 September 1998 (11.09.98) <b>(30) Priority Data:</b> 08/927,739 11 September 1997 (11.09.97) US <b>(71) Applicant (for all designated States except US):</b> SOUTHWEST RESEARCH INSTITUTE [US/US]; 6220 Culebra Road, P.O. Drawer 28570, San Antonio, TX 78238 (US). <b>(71)(72) Applicants and Inventors:</b> DEARNALEY, Geoffrey [GB/US]; 19826 Wittenburg, San Antonio, TX 78256 (US). ARPS, James, H. [US/US]; 6410 Lost Arbor, San Antonio, TX 78240 (US). <b>(74) Agent:</b> MORRIS, Paula, D.; Madan & Morris PLLC, Suite 700, 2603 Augusta, Houston, TX 77057 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>With amended claims.</i>
<b>(54) Title:</b> A METHOD OF DEPOSITING AN ELECTROCATALYST AND ELECTRODES FORMED BY SUCH METHOD <b>(57) Abstract</b> <p>Fuel cell electrodes comprising a minimal load of catalyst having maximum catalytic activity and a method of forming such fuel cell electrodes. The preferred method comprises vaporizing a catalyst, preferably platinum, in a vacuum to form a catalyst vapor. A catalytically effective amount of the catalyst vapor is deposited onto a carbon catalyst support on the fuel cell electrode. The electrode preferably is carbon cloth. The method reduces the amount of catalyst needed of a high performance fuel cell electrode to about 0.3 mg/cm<sup>2</sup> or less, preferably to about 0.1 mg/cm<sup>2</sup>. The electrocatalytic layer formed comprises unique, rod-like structures.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<b>AL</b>	Albania	<b>ES</b>	Spain	<b>LS</b>	Lesotho	<b>SI</b>	Slovenia
<b>AM</b>	Armenia	<b>FI</b>	Finland	<b>LT</b>	Lithuania	<b>SK</b>	Slovakia
<b>AT</b>	Austria	<b>FR</b>	France	<b>LU</b>	Luxembourg	<b>SN</b>	Senegal
<b>AU</b>	Australia	<b>GA</b>	Gabon	<b>LV</b>	Latvia	<b>SZ</b>	Swaziland
<b>AZ</b>	Azerbaijan	<b>GB</b>	United Kingdom	<b>MC</b>	Monaco	<b>TD</b>	Chad
<b>BA</b>	Bosnia and Herzegovina	<b>GE</b>	Georgia	<b>MD</b>	Republic of Moldova	<b>TG</b>	Togo
<b>BB</b>	Barbados	<b>GH</b>	Ghana	<b>MG</b>	Madagascar	<b>TJ</b>	Tajikistan
<b>BE</b>	Belgium	<b>GN</b>	Guinea	<b>MK</b>	The former Yugoslav Republic of Macedonia	<b>TM</b>	Turkmenistan
<b>BF</b>	Burkina Faso	<b>GR</b>	Greece			<b>TR</b>	Turkey
<b>BG</b>	Bulgaria	<b>HU</b>	Hungary	<b>ML</b>	Mali	<b>TT</b>	Trinidad and Tobago
<b>BJ</b>	Benin	<b>IE</b>	Ireland	<b>MN</b>	Mongolia	<b>UA</b>	Ukraine
<b>BR</b>	Brazil	<b>IL</b>	Israel	<b>MR</b>	Mauritania	<b>UG</b>	Uganda
<b>BY</b>	Belarus	<b>IS</b>	Iceland	<b>MW</b>	Malawi	<b>US</b>	United States of America
<b>CA</b>	Canada	<b>IT</b>	Italy	<b>MX</b>	Mexico	<b>UZ</b>	Uzbekistan
<b>CF</b>	Central African Republic	<b>JP</b>	Japan	<b>NE</b>	Niger	<b>VN</b>	Viet Nam
<b>CG</b>	Congo	<b>KE</b>	Kenya	<b>NL</b>	Netherlands	<b>YU</b>	Yugoslavia
<b>CH</b>	Switzerland	<b>KG</b>	Kyrgyzstan	<b>NO</b>	Norway	<b>ZW</b>	Zimbabwe
<b>CI</b>	Côte d'Ivoire	<b>KP</b>	Democratic People's Republic of Korea	<b>NZ</b>	New Zealand		
<b>CM</b>	Cameroon		Republic of Korea	<b>PL</b>	Poland		
<b>CN</b>	China	<b>KR</b>	Republic of Korea	<b>PT</b>	Portugal		
<b>CU</b>	Cuba	<b>KZ</b>	Kazakistan	<b>RO</b>	Romania		
<b>CZ</b>	Czech Republic	<b>LC</b>	Saint Lucia	<b>RU</b>	Russian Federation		
<b>DE</b>	Germany	<b>LI</b>	Liechtenstein	<b>SD</b>	Sudan		
<b>DK</b>	Denmark	<b>LK</b>	Sri Lanka	<b>SE</b>	Sweden		
<b>EE</b>	Estonia	<b>LR</b>	Liberia	<b>SG</b>	Singapore		

**TITLE: A METHOD OF DEPOSITING AN ELECTROCATALYST  
AND ELECTRODES FORMED BY SUCH METHOD**

**Field of the Invention**

5           The application provides a process for depositing a minimal load of an electrocatalyst (preferably comprising platinum) onto a support, preferably a support capable of use as a fuel cell electrode (most preferably carbon cloth), while maximizing the catalytic activity of the catalyst. The application also is directed to products comprising novel electrocatalytic coatings comprising rod-shaped structures.

10          **Background of the Invention**

          A fuel cell is an electrochemical device in which electrical energy is generated by chemical reaction without altering the basic components of the fuel cell--that is, the electrodes and the electrolyte. Fuel cells combine hydrogen and oxygen without combustion to form water and to produce direct current electric power. The process  
15       can be described as electrolysis in reverse. The fuel cell is unique in that it converts chemical energy continuously into electrical energy without an intermediate conversion to heat energy.

          Fuel cells have been pursued as a source of power for transportation because of their high energy efficiency (unmatched by heat engine cycles), their potential for fuel  
20       flexibility, and their extremely low emissions. Fuel cells have potential for stationary and vehicular power applications; however, the commercial viability of fuel cells for power generation in stationary and transportation applications depends upon solving a number of manufacturing, cost, and durability problems.

          One of the most important problems is the cost of the proton exchange catalyst

for the fuel cell. Some of the most efficient catalysts for low temperature fuel cells are noble metals, such as platinum, which are very expensive. Some have estimated that the total cost of such catalysts is approximately 80% of the total cost of manufacturing a low-temperature fuel cell.

5           In a typical process, an amount of a desired noble metal catalyst of from about 0.5-4 mg/cm<sup>2</sup> is applied to a fuel cell electrode in the form of an ink, or using complex chemical procedures. Unfortunately, such methods require the application of a relatively large load of noble metal catalyst in order to produce a fuel cell electrode with the desired level of electrocatalytic activity, particularly for low temperature  
10 applications. The expense of such catalysts makes it imperative to reduce the amount, or loading, of catalyst required for the fuel cell. This requires an efficient method for applying the catalyst.

          In recent years, a number of deposition methods, including rolling/spraying, solution casting/hot pressing, and electrochemical catalyzation, have been developed  
15 for the production of Pt catalyst layers for proton exchange membrane (PEM) fuel cells. Although thin sputtered Pt coatings deposited on carbon cloth can measurably improve fuel cell performance, this approach generally is not considered to be viable for large area deposition or as a stand alone treatment for applying platinum.

Continuing challenges remain in the development of scalable methods for the  
20 production of large-area (>300 cm<sup>2</sup>), high performance (>1 A/cm<sup>2</sup> at 0.6V) fuel cell electrodes with low Pt loadings (<0.3 mg/cm<sup>2</sup>).

**Summary of the Invention**

The present invention provides a method for depositing onto a support a vaporizable composition comprising a catalytic component. The method comprises converting the vaporizable composition into a vapor, and depositing the vapor onto the support in an amount sufficient to produce a concentration of the catalytic component adapted to produce a catalytically effective coating on the support. The invention also is directed to electrodes produced by the method, and to electrodes comprising a support comprising a deposit disposed thereon which comprises a catalytically effective load of an electrocatalyst comprising an electrocatalytic active area at least in part comprising rod-shaped structures.

**Brief Description of the Figures**

Figure 1 is a graph depicting the polarization performance of an experimental electrode used as cathode and anode at a cell pressure of 206.85 kPa (30 psig). The experimental electrode was made from a carbon-only ELAT carbon cloth electrode, available from E-TEK, Natick, MA, bearing Pt deposited using electron beam physical vapor deposition (EB-PVD) according to the present invention, as described in Examples III and IV.

Figure 2 is a graph depicting the polarization performance at 206.85 kPa (30 psig) cell pressure of a conventional sputtered Pt catalyzed ELAT gas diffusion media experimental electrode used as cathode and anode, as described in Example IV.

Figure 3 is a graph depicting the polarization performance at 206.85 kPa (30 psig) cell pressure of a conventional sputtered Pt catalyzed ELAT gas diffusion media experimental electrode used as an anode, as described in Example IV.

Figure 4 is a graph depicting a side-by-side comparison of performance at cell  
5 and compensated potentials of a conventional sputtered Pt catalyzed experimental electrode and an inventive EB-PVD Pt catalyzed experimental electrode used as a cathode showing the polarization performance at 206.85 kPa (30 psig) cell pressure, as described in Example IV.

Figure 5 is a graph depicting a side-by-side comparison of performance  
10 between a conventional sputter deposited Pt electrode and an inventive EB-PVD Pt deposited electrode used as an anode showing the polarization performance at 206.85 kPa (30 psig) cell pressure, as described in Example IV.

Figure 6 is a graph depicting a side-by-side comparison of performance at cell  
and compensated potentials of another conventional sputter deposited Pt electrode and  
15 another inventive EB-PVD Pt deposited electrode used as a cathode showing the polarization performance at 206.85 kPa (30 psig) cell pressure, as described in Example IV.

Figures 7-9 are field-emission scanning electron microscopy pictures  
(micrographs or FE-SEMs) of an uncatalyzed ELAT gas diffusion media at various  
20 magnifications.

Figures 10-20 are FE-SEMs of ELAT gas diffusion media catalyzed using EB-PVD of Pt according to the present invention, as described in Examples III and IV, at various magnifications.

Figures 21-26 are FE-SEMs of ELAT gas diffusion media catalyzed using  
5 conventional sputter deposition of Pt, as described in Examples III and IV, at various magnifications.

#### **Brief Description of the Invention**

Vacuum deposition techniques are routinely employed in a variety of applications ranging from metallized layers in the fabrication of semiconductors to  
10 barrier coatings for food packaging, hard coatings for cutting tools, and optical thin films. Some of the typical methods employed include chemical vapor deposition, physical vapor or thermal deposition, ion sputtering, and ion beam assisted deposition (IBAD). Because the materials are deposited in a vacuum (typically less than 13.3 mPa, or  $1 \times 10^{-4}$  torr), contamination of the films can be minimized while maintaining  
15 good control over film thickness and uniformity. Such techniques, in many cases, lend themselves to deposition of materials over large areas via a reel-to-reel or web coating processes.

The present invention uses vacuum deposition techniques, preferably EB-PVD, to deposit a catalyst onto a support. The support for the claimed coating may be any  
20 number of materials, preferred materials being suitable for use in electrodes in fuel cells. Such materials include, but are not necessarily limited to proton exchange

membranes (PEMs), carbon cloth, and carbon paper. Preferred supports are carbon supports.

Suitable PEMs include, but are not necessarily limited to polymer electrolyte membranes or ionomers, such as NAFION™, available from Dupont, Inc.,  
5 Wilmington, Delaware, and most preferably a fluoroionomeric membrane comprising a composite of polytetrafluoroethylene with impregnated ion exchange media known as GORE-SELECT®, available from W. L. Gore & Associates, Elkton, Maryland.

Suitable carbon supports include, but are not necessarily limited to, graphite, carbon fiber, and carbon cloth. Suitable commercially available carbon gas diffusion  
10 media for use as a support include, but are not necessarily limited to: carbon gas diffusion electrodes; iso-molded graphite; carbon bundles, preferably having 6,000 or 12,000 carbon filaments/bundle; reticulated carbon; carbon cloth; and, carbon paper. A preferred carbon support is carbon cloth, preferably a carbon-only ELAT carbon cloth electrode, available from E-TEK, Natick, MA.

15 The support preferably should resist corrosion in an acid environment, offer good electrical conductivity and, for carbon supports, allow fast permeation of oxygen (cathode) and hydrogen (anode), comply with thin layer manufacturing techniques, and contribute little to the weight and cost of the fuel cell assembly.

A catalyst is deposited onto the support, preferably using vacuum deposition  
20 techniques. As used herein, the term "catalyst" is defined as a substance that increases the rate of approach to equilibrium of a chemical reaction without being substantially



consumed in the reaction. A catalyst works by forming chemical bonds to one or more reactants and thereby facilitating their conversion. A catalyst does not affect the reaction equilibrium. A catalyst provides for alternate reaction pathways/mechanisms that offer an overall lower activation energy for the reaction, thus accelerating the rate of turnover.

In electrochemical systems the reaction rate (power density/current density) is controlled by controlling temperature and electrocatalysis. Electrocatalysts are substances (metals, metal oxides, non-metals, organometallics, etc.) that can promote the rate of electrochemical reactions, i.e., ionization, deionization, for a given surface area. The electrocatalyst is a substance that accelerates the rate of forward and backward charge transfer reactions for a given redox system (charge transfer reaction) without perturbing chemical equilibrium (thermodynamics is not affected by the presence of a catalyst). An electrocatalyst provides for alternative reaction pathways/mechanisms that offer an overall lower activation energy for the electrochemical reaction, thus accelerating the rate of electrochemical turnover. The rate at which a reaction at an electrode surface proceeds may be limited by the intrinsic kinetics of the heterogeneous process. In non- electrochemical systems, the macroscopically observed reaction rate is the result of a series of elementary processes.

A key difference between an electrocatalyst and other types of catalysts is the ability of the electrocatalyst to manipulate an additional driving force variable: the electric potential. A change in potential of one volt at the surface of the electrocatalyst/electrode can cause a change in reaction rate of eight orders of

magnitude. This change may be equivalent to an increase in temperature of several hundred degrees Celsius for a typical catalytic reaction. (i.e., non-electrochemical reaction). For fuel cell applications heterogeneous electrocatalysts exist as foils, deposited films, individual particles or supported particles. The word "heterogeneous" means that the reactant is normally in a different phase (gas or liquid) than the electrocatalyst (solid).

To describe how a particular surface electrocatalyzes/catalyzes a particular reaction requires a knowledge of three factors: the mechanism of the reaction pathway; the chemisorption energy of the surface species; and, the effective activation energy (energies) of the reaction. Metals with empty "d" orbitals are suitable electrocatalysts because they adsorb  $H_2$  rapidly, with low activation energies of adsorption. Referring to the Periodic Table of the Elements, suitable electrocatalysts include, but are not necessarily limited to: Group IVA metals (Ti, Zr, Hf); Group VA metals (V, Nb, Ta); Group VIA metals (Cr, Mo, W); and, Group VIIA metals (Mn, Tc, Re). These metals appear to adsorb  $H_2$  with high enthalpy of adsorption. Preferred electrocatalysts are metals which adsorb  $H_2$  with lower heats, including but not necessarily limited to Groups VIIIA, B, and C (Fe, Ru, Os; Co, Rh, Ir; Ni, Pd, Pt), preferably Ni, Pd, or Pt, most preferably Pt. The group IB metals (Cu, Ag, Au) have low heats of adsorption, but are not preferred as  $H_2$  adsorption catalysts because they have slow activated chemisorption.

The Group VIII metals, preferred electrocatalysts for use in fuel cell electrodes, are believed to have heats of adsorption in a range which enables the reactant to

chemisorb strongly enough to allow for surface reaction (electrochemical oxidation/reduction by breakdown and discharge of adsorbed species) but not strongly enough to form surface-bonded species. Due to the greater activation energy of chemisorption for oxygen, electrocatalytic reactions which involve surface oxygen  
5 require higher temperatures in order to produce satisfactory reaction rates than do reactions which involve surface hydrogen. For example, the most widely used oxygen electrodes for low temperatures are silver and platinum. Summarizing, suitable catalysts for electrochemical applications include, but are not necessarily limited to Pt, Pd, Ru, Rh, Ir, Ag, Au, Os, Re, Cu, Ni, Fe, Cr, Mo, Co, W, Mn, Al, Zn, Sn, with  
10 preferred catalysts being Ni, Pd, Pt, most preferably Pt.

In order to apply an electrocatalytic coating to the support, the electrocatalyst is heated to vaporization. The heating may be provided using any suitable source, including but not limited to an electron beam, electrical resistance heating, microwave, and laser. In a preferred embodiment, the catalyst is heated using an electron beam.

15 In a preferred embodiment, the support is placed in a vacuum chamber provided with a crucible, preferably made of graphite, with a mechanism for directing a high power electron beam onto a solid chunk of the catalyst to produce a catalyst vapor. Where platinum is the catalyst, the catalyst is heated with the electron beam to between about 2300°C-2600°C (4172°F - 4712°F) to form a vapor.

20 During the deposition process, the pressure in the vacuum chamber should be pumped down to a pressure sufficient to cause the vapor to condense onto the support.

A preferred pressure is about 13.3 mPa (about  $10^{-4}$  torr) or less. As used herein, the term "in a vacuum" is defined to mean a pressure of about 13.3 mPa ( $10^{-4}$  torr) or less. The vaporized catalyst preferably should be allowed to deposit or condense onto the support in a vacuum. The temperature in the vacuum may vary; however, the

5 temperature should be low enough not to damage the support, and low enough to permit the catalyst vapor to condense onto the support. Preferably, the temperature should be about 100-200°C or less. The deposition rate preferably should range from about 0.5-10Å/sec.

The deposition should continue until a catalytically effective amount of the

10 catalyst is deposited onto the support. As used herein, the term "catalytically effective" is defined to mean effective to catalyze the necessary reactions. The term "catalytically effective amount" is defined to mean as small an amount of the catalyst as possible to result in enough active catalyst to catalyze the necessary reactions.

Typically, the amount of catalyst deposited to result in a catalytically effective amount

15 should be from about 0.01 to about 0.3 mg/cm<sup>2</sup>, preferably less than about 0.2 mg/cm<sup>2</sup>. The thickness of the coating may be monitored by standard methods, e.g., using the frequency change of a quartz crystal oscillator. The weight of the film may be determined by weighing a known area of the support before and after depositing the film.

20 The support preferably is used as an electrode in a fuel cell. Preferred fuel cell electrodes are as thin as possible, typically having a thickness between about 0.010-0.175 inches. Where the support is a PEM, the PEM preferably should be treated with

a carbon catalyst support, such as carbon ink, using standard techniques well known in the art. Carbon supports preferably should be wet-proofed.

Individual membranes or electrodes may be prepared, or the process may be scaled up for production purposes. Where the support is thermally sensitive, cooling  
5 may be required. In the laboratory, cooling may be accomplished by mounting the support on the surface of an aluminum cylinder which is rotated through the ion and coating flux. With this setup, water cooling is no longer necessary because of the sufficiently large thermal mass of the cylinder combined with the fact that the support is no longer continuously exposed to the ion beam and coating flux. This fixture  
10 appears to hold promise from a scale-up perspective as large areas of support material can be rolled up on a drum and coated in a reel-to-reel process. Preferably, a scaled up arrangement will be a reel-to-reel arrangement in vacuo. The coating technique described herein is adaptable for use with conventional "web coating" technologies.

Upon incorporation into a membrane electrode assembly and into a fuel cell  
15 supplied with hydrogen gas under suitable flow conditions, the electrocatalytic coating of the invention exhibits an open circuit voltage of at least about 0.8V, preferably about 1V. The term "open circuit voltage" or "open cell voltage" is defined as the spontaneous potential or voltage present in a fuel cell when no current is allowed to flow. This potential is known as the cell equilibrium potential and its theoretical value  
20 can be derived from thermodynamics using the Nernst relationship:

$$E = E^{\circ} + \frac{RT}{nF} \ln \left[ \frac{\prod (\text{reactant activity})}{\prod (\text{product activity})} \right] \quad [1]$$

where  $n$  is the number of electrons participating in the reaction,  $F$  is the Faraday's constant (96,439 coulombs/g-mole electron),  $R$  is the universal gas constant,  $T$  is the cell temperature and  $E^{\circ}$  is the reversible standard cell potential for the reaction, which  
 5 is directly related to the maximum electrical work  $W_e$  obtainable in a fuel cell operating at constant temperature and pressure and is thermodynamically given by the change in Gibbs free energy ( $\Delta G$ ) of the electrochemical reaction:

$$W_e = \Delta G^{\circ} = -nFE^{\circ} \quad [2]$$

For the overall cell reaction, the open circuit potential increases with an  
 10 increase in the activity of reactants and a decrease in the activity of products. Changes in cell temperature and pressure also influence the reversible cell potential. Practically, the open circuit voltage is the maximum voltage attainable during a fuel cell polarization or I V curve, and corresponds to the cell potential at which the drawn net cell current is zero.

15 For example, after appropriate equilibration time, a PEM fuel cell will observe an open circuit voltage of from about 0.8 V and about 1 V versus a reference standard

hydrogen electrode when operating: (a) at a temperature of from about 50° C to about 130° C; (b) with hydrogen and air as reactants; (c) humidified at a temperature of from about 50° C to about 140° C; (d) with relative humidities of from about 0 to about 100 %; (e) with pressures of from about 0 to about 100 psig; and, (f) with flows  
5 large enough to assure complete irrigation of the electrocatalyst phase throughout the electrode.

The vacuum deposition techniques of the present invention are capable of forming large-area ( $>300 \text{ cm}^2$ ), high performance fuel cell electrodes with low Pt loadings ( $<0.3 \text{ mg/cm}^2$ , preferably about  $0.1 \text{ mg/cm}^2$ ) which are capable at a cell  
10 potential of about 0.6V of producing a power output of well over  $400 \text{ mA cm}^{-2}$ , preferably over about  $800 \text{ mA cm}^{-2}$ , most preferably about  $1000 \text{ mA cm}^{-2}$ , under the following conditions: in a single cell fuel cell fixture; with appropriate gas distribution manifolds and appropriate gasketing; using ELAT as gas diffusion material; with appropriate cell compression (from about 5.65 to about 33.89 N m/bolt, or about 50 to  
15 about 300 lb in/bolt compression torque); at cell operating conditions which typically include water saturation of the anode and ( $\text{H}_2$ ) reactant feed at humidification temperatures of from about 40 to about 90° C; cell temperatures of about 40 to about 80° C; volumetric flowrate reactant feeds of about 1.2 -2 and about 2-5 times the stoichiometric value, for  $\text{H}_2$  and air, respectively; and cell pressure set from about 0 to  
20 about 413.7 kPa gauge (1 and about 60 psig) for the anode ( $\text{H}_2$  electrode) and cathode (air electrode).

Tafel analysis on experimental cathodes (described in Example IV)

demonstrates about a five-fold difference in oxygen reduction exchange current density between the vapor deposition techniques of the present invention and conventional sputtered electrodes ( $i_{o,PVD}/i_{o,sput} \sim 4.89$ ). The difference suggests that vapor deposited cathodes, such as the EB-PVD Pt deposited cathodes formed in Examples III and IV, have a substantially larger electrocatalytic active area or “three phase boundary” (TPB) than conventional sputtered Pt cathodes. This electrochemical conclusion was confirmed by field-emission scanning electron microscopy pictures (micrographs or FE-SEMs). FE-SEMs showed the presence of a microstructure in the inventive vapor deposited electrodes with readily recognizable Pt particles and the presence of “rod-shaped” structures 10, which become visible beginning at about x10k magnification, as shown in Figs. 14-15 and 17-22. These rod-shaped particles were not observed in the sputtered sample, as shown in Figs. 23-28.

For purposes of the present application, the term “rod-shaped” is defined to mean substantially cylindrical shaped structures having a diameter 10a, as shown in Fig. 17, and a length 10b, as shown in Fig. 17. The rod-shaped structures shown in Figs. 12-13 and 15-20 have (a) a diameter 10a (Fig. 17) of from about 40-about 60 nm, typically about 60 nm, and (b) a length which is difficult to verify, but appears to vary.

Electrodes made according to the present invention may be used in fuel cells having many different constructions known to those skilled in the art. The invention will be better understood with reference to the following examples, which are for illustrative purposes only and should not be construed as limiting the invention, which



is defined by the claims.

### **EXAMPLE I**

Using a vacuum chamber 2 m long and 1.5 m in diameter, candidate coatings were first deposited on glass slides and small coupons of representative membrane and electrode material, and subjected to compositional and microstructural analysis. Next, a series of larger-area electrode materials were coated and evaluated using a small home-built test cell, described below.

After a final down-selection, a limited number of full scale 150 cm<sup>2</sup> electrodes were fabricated and tested. Special sample fixtures, described in more detail in Example II, were developed to allow for the coating of carbon cloth electrodes over areas as large as 300 cm<sup>2</sup>. Samples up to 250 cm<sup>2</sup> were coated using a planetary gear arrangement. The samples were asynchronously rotated through an electron beam-physical vapor deposition (EB-PVD) coating flux to ensure uniform deposition of the Pt over the entire electrode surface.

Carbon cloth and carbon paper materials, both plain and wet-proofed (i.e. coated with TEFLON<sup>®</sup>), were coated with 0.01, 0.05, and 0.10 mg/cm<sup>2</sup> of Pt. In addition, wet-proofed samples treated with a layer of carbon-only ELAT were procured from E-TEK for Pt coating in a similar manner.

A comparison of the thicknesses, morphologies, and Pt distributions of selected fuel cell electrode materials was performed using scanning electron microscopy (SEM)

and transmission electron microscopy. The objective of such measurements was to determine the effect of electrode structure on the resulting efficiency of the fuel cell.

Performance analysis of catalyst coated electrode materials was undertaken using a small "home-built" test cell. The simple test cell consisted of two 6.9 cm stainless steel flanges used as collector plates with single air/hydrogen inlets and pairs of 100-mesh stainless steel screens mounted on each side of the electrode to provide a degree of gas diffusion. The cell active area was approximately 64 cm<sup>2</sup> and the same electrode material was used for both the anode and the cathode. The system was pressurized with humidified hydrogen and compressed air at 96.53 kPa (14 psig) and a flow rate of ~0.5 liters per minute. Current-voltage tests were conducted at ambient temperature at each outlet.

In all tests, the EB-PVD Pt-coated ELAT material repeatedly demonstrated superior behavior compared to a higher loaded control material, namely E-TEK platinum over VULCAN XC-72 ELAT solid polymer electrolyte electrode (4 mg/cm<sup>2</sup>). Measurable improvements in efficiency were observed for the carbon cloth with increasing Pt loading. It was also possible to further reduce the Pt loading of the EB-PVD coated carbon-only material on the anode side to as low as 0.01 mg/cm<sup>2</sup> with minimal reduction in performance.

## **EXAMPLE II**

Fabrication and testing of three full scale 150 cm<sup>2</sup> electrodes was performed based on the results of the screening tests with the small test fixture.

The electrodes prepared for testing are summarized in Table 2.

TABLE 2

Sample I.D.	Membrane/Electrode Material	Deposition Method	Pt Loading (mg/cm <sup>2</sup> ) (Anode/Cathode)
1	20 $\mu$ m GORE SELECT®/C-only ELAT	EB-PVD Pt	0.10/0.01
2	50 $\mu$ m GORE SELECT®/C-only ELAT	EB-PVD Pt	0.05/0.05
3	20 $\mu$ m GORE SELECT®/C paper	Sputtered Pt	0.10/0.10

In order to effectively evaluate the full-scale electrodes, a Scribner Associates Model 890 load system was leased for use with a test fixture. Basically, the test fixture consisted of the chosen membrane sandwiched by the chosen electrodes surrounded by graphite plates having flow channels to allow the passage of hydrogen and oxygen gas into contact with the electrodes. A metal plate sandwiched the assembly on each side. The metal plates had suitable holes drilled for introducing the hydrogen and oxygen gas, and electrical leads collected current and connected each plate to the load unit. The 1 kW, 125 amp Scribner load unit recorded all performance data from the cell while controlling the temperatures of the cell and feed gases, ensuring consistent, repeatable results. The comparison test fixture was rated at more than 100 watts

depending on the configuration and operational mode. The modular design of the cell allowed for many different possible configurations and use of different material thicknesses.

Particular attention was paid to the gas handling system in assembling the test  
5 cell. All of the tubing and connectors were made of a 316 stainless steel and TEFLON  
(where electrical isolation was needed) in an effort to limit transport of metal cations  
into the cell. The gases were passed through a pair of Perma Pure Inc. NAFION-  
based humidifiers and then carried to the cell via stainless tubing wrapped in heater  
tape to maintain proper temperature. Next, each gas was directed into 3-branch  
10 manifolds for the gas inlets and outlet. Exhaust gases were passed through a pair of  
flowmeters to measure the amount of excess fuel and air flow. Flowmeters were not  
installed on the upstream side as they contain a significant amount of aluminum parts  
which may contaminate the gases and hinder cell performance. A stainless steel  
reservoir with a built in heater was used to heat the cell and was controlled by the  
15 Scribner load unit. A plastic submersible chemical pump circulated deionized water in  
a closed circuit composed of TEFLON tubing through the cell and humidifiers and  
back to the container. No active cooling of the cell was needed.

Performance tests typically were conducted at a temperature of 60°C, 30 psi  
humidified gasses, 3.5 time Stoichiometric Ratio (SR) or less on the air side, and 2 SR  
20 or less on the reactant side. The first objective was to match the performance curves  
for the electrode of the present invention with the control, comprising an electrode  
from a Gore PRIMEA® membrane electrode assembly, available commercially from

W.L. Gore & Associates, Inc., under similar test conditions. After assembly, the cell was conditioned for several hours at low current. Once the performance stabilized, current voltage data was acquired starting at high currents and slowly ramping down.

Once the performance curve of the test membrane/electrode assembly had been  
5 matched with the performance curves of the controls, testing was performed. The cell was first conditioned for eight hours at a low current setting with humidified gasses at 30 psi. The highest current density achieved using the 100nm/10nm EB-PVD Pt-coated ELAT with the 20  $\mu\text{m}$  membrane was 732  $\text{mA}/\text{cm}^2$  at .358 V. In general, the overall power output of EB-PVD deposited electrode was 10-50% less than the output  
10 of the control. However, it is important to point out that this performance was achieved with less than 20% of the total Pt loading of the baseline material.

The foregoing tests demonstrate successful use of EB-PVD in the fabrication of 150  $\text{cm}^2$  membrane electrode assemblies with total Pt loadings as low as 0.11  $\text{mg}/\text{cm}^2$ .

15

### EXAMPLE III

Experiments were performed to characterize the electrochemical (fuel cell performance) and morphological properties of experimental electrodes prepared by Pt  
EV-PVD and magnetron sputtering of ELAT<sup>®</sup> gas diffusion media. MEAs prepared with PVD electrodes (cathodes or anodes) yielded superior polarization performance  
20 compared to the sputtered half cells.

*Electrode preparation:* Vacuum vaporization-based catalyzed electrodes were prepared using (a) electron-beam physical vapor deposition (EB-PVD) according to the present invention, and (b) conventional magnetron sputtering of Pt. In each case, the Pt was deposited onto double-sided ELAT commercial carbon-cloth gas diffusion media. The catalyzation took place onto the “active side” of the diffuser, i.e., on the side normally in contact with electrocatalyst layers.

For EV-PVD, a catalyst deposition rate of  $1 \text{ \AA/sec}$  was chosen. The chamber base pressure was about  $13.3 \text{ mPa}$  ( $10^{-5} \text{ torr}$ ). The Pt source was 99.95% purity.

For magnetron sputtering, a  $15.24 \text{ cm}$  (6 in) diameter magnetron sputtering unit was used to sputter Pt onto the substrate at a rate of about 2 to about  $3 \text{ \AA/sec}$ . The chamber base pressure was about  $1.33 \text{ mPa}$  ( $10^{-4} \text{ torr}$ ). The Pt target was a foil with a purity 99.99%.

Electrodes at a loading level of  $0.1 \text{ mg Pt cm}^{-2}$  were prepared using both techniques and compared. Energy dispersive spectroscopy (EDS) x-ray analysis detected only Pt as the vaporized phase using either technique. The catalyst layers formed using either technique had an average thickness of about  $500 \text{ \AA}$ .

The Pt-catalyst electrodes were incorporated into experimental MEA's using methods known in the art. In order to solely characterize the performance of the vacuum coated electrode, e.g., as cathodes, MEA's were prepared using a Gore PRIMEA® membrane electrode assembly as an anode, and vice versa when the vacuum coated electrode was characterized as the anode half cell. The Gore PRIMEA®

membrane electrode assembly presented a loading of 0.1 mg Pt cm<sup>-2</sup> and the experimental MEA's used a 30  $\mu$ m GORE SELECT<sup>®</sup> (950EW) perfluorinated membrane to form a membrane electrode assembly in all cases.

#### EXAMPLE IV

5           *Fuel Cell and Tafel Performance Tests:* To electrochemically characterize the performance of the experimental electrodes as cathodes and anodes, H<sub>2</sub>/air fuel cell testing analysis was performed. The MEAs containing electrode active areas of 25 cm<sup>2</sup> and 30  $\mu$  GORE SELECT<sup>®</sup> membranes were mounted in standard fuel cell reactor fixtures using ELAT gas diffusion media for the reference half cell and were clamped  
10   to standard compression levels. The fuel cell test was conducted using a fuel cell station commercially available from Globetech, Inc., Bryant, TX. For the pressurized experiments, a 103.43/103.43 kPa and 206.85/206.85 kPa (15/15 psig and 30/30 psig) gauge anode and cathode, respectively; the cell temperature was set at about 80°C with anode and cathode feeds humidified at about 60-70°C and 85°C; and, flowrates  
15   set at 2/3.5 times the stoichiometric value for H<sub>2</sub> and air, respectively. In some tests, a constant flow of 500-1000 standard cm<sup>3</sup>/min was used for the H<sub>2</sub> and air, respectively. For the atmospheric pressure runs, the cell temperature and reactant humidification was set at about 60°C. The performance was evaluated at different times on stream (TOS).

20           *Fuel Cell Performance Analysis:* Fig. 1 shows the polarization performance at 206.85 (30 psig) cell pressure of a Pt EB-PVD catalyzed ELAT gas diffusion media

experimental electrode used as a cathode and anode. The MEA used was a Gore PRIMEA<sup>®</sup> membrane electrode assembly (anode or cathode). Figs. 2 and 3 are the equivalent graphs (at different cell pressures) for the Pt-sputtered experimental electrode used as cathode and anode. Polarization performance from these graphs suggests that the Pt evaporated electrode displayed superior performance compared to the sputtered electrode for both cathode and anode operation.

Figures 4 and 5 show a side-by-side comparison of performance between both vacuum catalyzed technologies. When used as a cathode, the inventive PVD catalyzed electrode showed improved performance throughout the entire polarization curve, i.e., OCV, activation region, ohmic region and mass transport region, compared with the sputtering catalyzed electrode (Fig. 4 ). For example, at 0.6V, the MEA containing the PVD half cell operating as cathode yielded about  $400 \text{ mA cm}^{-2}$  with an OCV of 0.889 V against  $60\text{-}100 \text{ mA cm}^{-2}$  and OCV of 0.779-0.810 V for the sputtered system (i.e., 4 times lower performance). The compensated (IR-free) performance for the sputtered system followed the curve for the total cell potential indicating that the controlling electrode was the cathode half cell.

Fig. 5 shows the same analysis, but with the vacuum vaporized electrode used as anode. Here, although the OCV and the catalyst regions of the polarization curves were comparable for both systems (as expected due to the reference cathode operating as cathode in both cases), the IR region and the mass transport region for the MEA containing the sputtered electrode demonstrated substantially lower performance, i.e., larger slope, (larger membrane resistance and anode linear polarization losses) and



more pronounced mass transport effects. For example, at 0.6 V cell potential, the MEA containing the sputtered anode yielded between 300 and 400 mA cm<sup>-2</sup> while the PVD anode-containing MEA yielded almost 1000 mA cm<sup>-2</sup>. The difference in performance observed in this case (experimental electrode used as anode) was mostly  
 5 due to anode polarization differences: at 0.6 V the sputtered anode suffered about 240 mV polarization loss against 92 mV polarization loss for the EB-PVD cathode.

*Tafel Analysis:* In order to rationalize the difference in performance of electrodes made using EB-PVD versus sputtering, the electrocatalytic activity/activation polarization performance of the electrode was probed using a Tafel  
 10 analysis. Briefly, a fuel cell polarization curve can be described using the semi-empirical equation:

$$E = E_o - b \log i - iR - me^{ni}$$

where the first negative term ( $-b \log i$ ) indicates the cathode activation loss (electrocatalyst/electrodics, i.e., resistance to charge transfer), the second negative  
 15 term ( $-iR$ ) addresses the ohmic losses due to membrane resistance, contact potential and anode linear polarization losses, and the third negative term ( $-me^{ni}$ ) addresses mass transport polarization losses. During a Tafel analysis, the ohmic and mass transport losses are normally eliminated and electrocatalytic parameters are measured by curve fitting the data to the following expression:

$$20 \quad E_c = E + iR \simeq E_o - b \log i$$

where the compensated ( $iR$ -free) cell potential is used to eliminate any ohmic loss that could be present in the catalyst region of the polarization curve. The Tafel slope,  $b$  and the parameter  $E_o$  (which is related to the exchange current density  $i_o$ , and, thus related to the polarizability of the interface due to its dependence with the intrinsic electrocatalytic activity and the length of three phase boundary, TPB, i.e., number of electrocatalytic active sites or electrochemically active surface area) were then evaluated for the evaporated and sputtered vacuum coated electrodes used as a cathode (controlling half cell). The experimental Tafel curve is shown in Fig. 6.

Tafel analysis suggested that, although the Tafel slope for the evaporated electrode was larger than the sputtered electrode, the PVD cathode provided a substantially larger electrocatalytic active area (larger TPB) than the sputtered cathode, as found comparing the  $E_n$  values for both electrodes 1.145V (PVD) versus 0.853 V (sputtering). The superior polarization performance of the PVD electrode compared with the sputtered electrode can then be explained on the basis that the exchange current density  $i_o$  for oxygen reduction in the evaporated electrodes was about 5 times higher than that in the sputtered electrode due to the larger electrochemically active area.

Although the foregoing argument is directly valid for the catalyst region of the polarization curve, the difference in performance observed at the ohmic and mass transport regions of the curve is only indirectly related to the reduced electrocatalytic active area. Factors which would directly relate to the difference in performance at the ohmic and mass transport regions of the curve would be, *e.g.*, reduced hydration of

membrane (due to lower current densities) or flooding. These factors, nevertheless, are directly related to current density, which is directly related to the extent of electrocatalytic area.

*FE-SEM Analysis:* In order to characterize the microstructure of the vacuum catalyzed electrodes, field-emission SEM was performed. FE-SEM micrographs for the uncatalyzed ELAT gas diffusion media were compared to FE-SEM micrographs for the Pt EB-PVD catalyzed ELAT diffusor and Pt sputtered catalyzed diffusor. Magnifications from x5k up to x50k were used. Pictures with x25k and x50k magnification showed most of the differences in structure.

Significant differences on the morphology of the Pt catalyst coating were observed between the EB-PVD and magnetron sputtering coating technologies. On the sputtered sample, the Pt particles were in the form of aggregates (Figs. 23-28), and in some cases the particles appeared to coalesce and form larger “fused” particles with a longitudinal dimension (18c, 18d, Fig. 25) of from about 400 to about 1000 nm. In these “fused” particles (18c, 18d, Fig. 25), the outer surface of individual particles was no longer visible (18, 18a, and 18b in Figs. 26 and 27).

On the EB-PVD catalyzed sample, the Pt particles were in the form of aggregates and in some cases the particles (12, Fig. 17) appeared to coalesce and form patches (14, Fig. 17). But the outer surface of individual Pt particles (12, Fig. 17) was readily recognizable in the coalesced patches as compared to that of the coalesced particles in the Pt sputtered sample (18, 18a, 18b, Figs. 26 and 27). In addition, a

good amount of rod-like Pt particles 10 (Figs. 14, 15, and 17-22) were observed on the EB-PVD catalyzed sample. These rod-like particles were not observed in the sputtered sample.

Persons of ordinary skill in the art will recognize that many modifications may  
5 be made to the present invention without departing from the spirit and scope of the present invention. The embodiments described herein are meant to be illustrative only and should not be taken as limiting the invention, which is defined in the following claims.

**We claim:**

1           1. A method for depositing onto a support a vaporizable composition  
2    comprising a catalytic component, said method comprising:  
3           converting said vaporizable composition into a vapor; and  
4           depositing said vapor onto said support in an amount sufficient to produce a  
5           concentration of said catalytic component adapted to produce a  
6           catalytically effective coating on said support.

1           2.     The method of claim 1 wherein at least said depositing occurs in a  
2    vacuum.

1           3.     The method of claim 1 or 2 wherein said support is a carbon catalyst  
2    support.

1           4.     The method of claim 3 wherein said carbon catalyst support comprises a  
2    material selected from the group consisting of graphite, a carbon filament bundle,  
3    reticulated carbon, carbon cloth, and carbon mesh.

1           5.       The method of any of claims 1-4 wherein said support comprises a  
2       membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3       ion exchange media, said composite comprising a thickness of about 1  $\mu\text{m}$ .

1           6.       The method of any of claims 1-5 wherein said vaporizable composition  
2       comprises a noble metal.

1           7.       The method of any of claims 1-6 wherein said catalytic component  
2       comprises a metal selected from the group consisting of platinum, gold, silver,  
3       palladium, ruthenium, rhodium, and iridium.

1           8.       The method of any of claims 1-7 wherein said concentration comprises less  
2       than about 0.3  $\text{mg}/\text{cm}^2$ .

1           9.       The method of any of claims 1-7 wherein said concentration comprises less  
2       than about 0.2  $\text{mg}/\text{cm}^2$ .

1           10.      The method of any of claims 1-7 wherein said concentration comprises

2 from about 0.01 to about 0.2 mg/cm<sup>2</sup>.

1 11. The method of any of claims 1-10 wherein said catalytic component  
2 comprises platinum.

1 12. The method of any of claims 1-11 wherein said support is a coating on a  
2 carbon cloth, wherein said coating is selected from the group consisting of carbon, a  
3 wet proofing material, and a combination thereof.

1 13. The method of claim 12 wherein said wet proofing material is polytetra-  
2 fluoroethylene.

1 14. The method of any of claims 1-13 further comprising  
2 providing a solid polymer electrolyte membrane; and  
3 disposing said support in ionic communication with said solid polymer  
4 electrolyte membrane.

1           15. The method of any of claims 1-14 wherein  
2           said solid polymer electrolyte membrane has a first side and a second side  
3           opposite said first side, and  
4           said method further comprises disposing said support on each of said first side  
5           and said second side to produce a membrane electrode assembly.

1           16.    An electrode produced by a process comprising:  
2           converting a vaporizable composition comprising a catalytic component into a  
3           vapor; and  
4           depositing said vapor onto a support in an amount sufficient to produce a  
5           concentration of said catalytic component adapted to produce a  
6           catalytically effective coating on said support.

1           17. The electrode of claim 16 wherein said support is a carbon catalyst support  
2           comprising a material selected from the group consisting of graphite, a carbon filament  
3           bundle, reticulated carbon, carbon cloth, and carbon mesh.

1           18.    The electrode of claim 17 wherein said carbon catalyst support



2 comprises a material selected from the group consisting of a carbon cloth and a coating  
3 on a carbon cloth selected from the group consisting of carbon, a wet proofing  
4 material, and a combination thereof.

1 19. The electrode of claims 16-18 wherein said support comprises a  
2 membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3 ion exchange media, said composite comprising a thickness of about 1  $\mu\text{m}$ .

1 20. The electrode of any of claims 16-19 wherein said vaporizable composition  
2 comprises a noble metal.

1 21. The electrode of claim 20 wherein said catalytic component comprises a  
2 metal selected from the group consisting of platinum, gold, silver, palladium,  
3 ruthenium, rhodium, and iridium.

1 22. The electrode of any of claims 16-21 wherein said catalytic component  
2 comprises platinum.

1           23.     The electrode of any of claims 16-22 wherein said support comprises a  
2     coating on a carbon cloth wherein said coating is selected from the group consisting of  
3     carbon, a wet proofing material, and a combination thereof.

1           24.     The electrode of claim 23 wherein said wet proofing material is  
2     polytetra-fluoroethylene.

1           25.     An electrode comprising a support comprising a vacuum deposited  
2     electrocatalyst disposed thereon, wherein said electrocatalyst is present in an amount  
3     of about 0.3 mg/cm<sup>2</sup> or less.

1           26.     The electrode of claim 25 wherein said electrocatalyst is deposited in a  
2     vacuum by ion beam assisted deposition.

1           27.     The electrode of claims 25 and 26 wherein, at a cell potential of about 0.6  
2     V, an MEA containing said electrode half cell operating as a cathode yields about 800  
3     mA cm<sup>-2</sup> or greater.

1           28. The electrode of claims 25-27 wherein said electrode comprises an  
2    electrocatalytic active area of about 300 cm<sup>2</sup> or greater.

1           29. The electrode of claims 25-28 wherein said catalyst comprises platinum.

1           30. The electrode of claims 25-39 wherein said support comprises a  
2    membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3    ion exchange media, said composite comprising a thickness of about 1 μm.

1           31. An electrode comprising a support comprising a deposit disposed  
2    thereon, said deposit comprising a catalytically effective load of an electrocatalyst  
3    comprising an electrocatalytic active area at least in part comprising rod-shaped  
4    structures.

1           32. The electrode of claim 31 wherein said rod-like structures are visible at  
2    a magnification of at least about x10k.

1           33. The electrode of claims 31 and 32 wherein said deposit further

2 comprises particles of said electrocatalyst comprising an outer surface, wherein said  
3 electrocatalytic active area comprises a majority of said outer surface of said particles.

1 34. The electrode of claims 31-33 wherein said support has a surface area, and  
2 said deposit covers about 300 cm<sup>2</sup> or more of said surface area.

1 35. The electrode of claims 31-34 wherein said catalyst comprises platinum.

1 36. The electrode of claims 31-35 wherein, at a cell potential of about 0.6  
2 V, an MEA containing said electrode as a half cell operating as a cathode yields a  
3 power output of about 400 mA cm<sup>-2</sup> or greater.

1 37. The electrode of claims 31-36 wherein, at a cell potential of about 0.6  
2 V, an MEA containing said electrode as a half cell operating as a cathode yields a  
3 power output of about 800 mA cm<sup>-2</sup> or greater.

1 38. The electrode of claims 31-47 wherein, at a cell potential of about 0.6  
2 V, an MEA containing said electrode as a half cell operating as a cathode yields a

3 power output of about 1000 mA cm<sup>-2</sup> or greater.

1 39. The electrode of claims 31-38 wherein said support comprises a  
2 membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3 ion exchange media, said composite comprising a thickness of about 1 μm.

1 40. A membrane electrode assembly comprising the support of any of claims  
2 15-39.

1 41. The electrode of any of claims 15-39 wherein  
2 said support has a surface area; and,  
3 substantially all of said surface area ionically communicates with an ionomeric  
4 membrane.

1 42. The electrode of claim 42 wherein said surface area is 300 cm<sup>2</sup> or  
2 greater.

**AMENDED CLAIMS**

[received by the International Bureau on 27 January 1999 (27.01.99);  
original claims 1-42 replaced by new claims 1-47 (10 pages)]

1           1. A method for depositing onto a support one or more catalytic components,  
2   said method comprising:  
  
3           providing one or more vaporizable catalytic components;  
  
4           converting said one or more vaporizable catalytic components into a vapor; and  
  
5           depositing said vapor onto said support in an amount sufficient to produce a  
6           concentration of said one or more catalytic components adapted to  
7           produce a catalytically effective coating consisting essentially of said  
8           one or more catalytic components on said support.

1           2.     The method of claim 1 wherein at least said depositing occurs in a  
2   vacuum.

1           3. The method of claim 1 or 2 wherein said support is a carbon catalyst  
2   support.

1           4. The method of claim 3 wherein said carbon catalyst support comprises a  
2   material selected from the group consisting of graphite, a carbon filament bundle,

3       reticulated carbon, carbon cloth, and carbon mesh.

1               5.       The method of any of claims 1-4 wherein said support comprises a  
2       membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3       ion exchange media, said composite comprising a thickness of about 1  $\mu\text{m}$ .

1               6.       The method of any of claims 1-5 wherein said one or more catalytic  
2       components comprises one or more noble metals.

1               7.       The method of any of claims 1-6 wherein said one or more catalytic  
2       components comprises one or more metals selected from the group consisting of  
3       platinum, gold, silver, palladium, ruthenium, rhodium, iridium.

1               8.       The method of any of claims 1-7 wherein said concentration comprises less  
2       than about 0.3  $\text{mg}/\text{cm}^2$ .

1               9.       The method of any of claims 1-7 wherein said concentration comprises less  
2       than about 0.2  $\text{mg}/\text{cm}^2$ .

1           10.     The method of any of claims 1-7 wherein said concentration comprises  
2     from about 0.01 to about 0.2 mg/cm<sup>2</sup>.

1           11.     The method of any of claims 1-10 wherein said one or more catalytic  
2     components comprise platinum.

1           12.     The method of any of claims 1-11 wherein said support is a coating on a  
2     carbon cloth, wherein said coating is selected from the group consisting of carbon, a  
3     wet proofing material, and a combination thereof.

1           13     The method of claim 12 wherein said wet proofing material is polytetra-  
2     fluoroethylene.

1           14.     The method of any of claims 1-13 further comprising  
2     providing a solid polymer electrolyte membrane; and  
3     disposing said support in ionic communication with said solid polymer  
4     electrolyte membrane.



1           15. The method of any of claims 1-14 wherein  
2           said solid polymer electrolyte membrane has a first side and a second side  
3           opposite said first side, and  
4           said method further comprises disposing said support on each of said first side  
5           and said second side to produce a membrane electrode assembly.

1           16. The method of any of claims 1-15 wherein said converting is thermally  
2           converting.

1           17. The method of any of claims 1-5 wherein said one or more catalytic  
2           components are metallic.

1           18. An electrode produced by a process comprising:  
2           providing one or more vaporizable catalytic components;  
3           converting said one or more vaporizable catalytic components into a vapor; and  
4           depositing said vapor onto a support in an amount sufficient to produce a

5 concentration of said one or more catalytic components adapted to  
6 produce a catalytically effective coating consisting essentially of said  
7 one or more catalytic components on said support.

1 19. The electrode of claim 18 wherein said support is a carbon catalyst support  
2 comprising a material selected from the group consisting of graphite, a carbon filament  
3 bundle, reticulated carbon, carbon cloth, and carbon mesh.

1 20. The electrode of claim 19 wherein said carbon catalyst support  
2 comprises a material selected from the group consisting of a carbon cloth and a coating  
3 on a carbon cloth selected from the group consisting of carbon, a wet proofing  
4 material, and a combination thereof.

1 21. The electrode of claims 18-20 wherein said support comprises a  
2 membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3 ion exchange media, said composite comprising a thickness of about 1  $\mu\text{m}$ .

1 22. The electrode of any of claims 18-21 wherein said one or more vaporizable  
2 catalytic components comprises one or more noble metals.

1           23.     The electrode of claim 22 wherein said one or more vaporizable  
2     catalytic components comprises one or more metals selected from the group consisting  
3     of platinum, gold, silver, palladium, ruthenium, rhodium, iridium.

1           24.     The electrode of any of claims 18-23 wherein said one or more  
2     vaporizable catalytic components comprises platinum.

1           25.     The electrode of any of claims 18-24 wherein said support comprises a  
2     coating on a carbon cloth wherein said coating is selected from the group consisting of  
3     carbon, a wet proofing material, and a combination thereof.

1           26.     The electrode of claim 25 wherein said wet proofing material is  
2     polytetra-fluoroethylene.

1           27.     The method of any of claims 18-26 wherein said converting is thermally  
2     converting.

1           28.     The method of any of claims 18-21, 25, and 26 wherein said one or  
2     more catalytic components are metallic.

1           29.     An electrode comprising a support having disposed thereon a vapor  
2     deposited electrocatalytic coating consisting essentially of one or more electrocatalysts,  
3     wherein said one or more electrocatalysts are present in an amount of about 0.3  
4     mg/cm<sup>2</sup> or less.

1           30.     The electrode of claim 29 wherein said vapor deposited electrocatalytic  
2     coating is deposited in a vacuum by electron-beam physical vapor deposition.

1           31.     The electrode of claims 29 and 30 wherein, at a cell potential of about 0.6  
2     V, an MEA containing said electrode half cell operating as a cathode yields about 800  
3     mA cm<sup>-2</sup> or greater.

1           32.     The electrode of claims 29-31 wherein said electrode comprises an  
2     electrocatalytic active area of about 300 cm<sup>2</sup> or greater.

1           33.     The electrode of claims 29-32 wherein said one or more catalytic  
2     components comprises platinum.

1           34.     The electrode of claims 29-33 wherein said support comprises a  
2     membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3     ion exchange media, said composite comprising a thickness of about 1  $\mu\text{m}$ .

1           35.     The electrode of claims 29-34 wherein said converting is thermally  
2     converting.

1           36.     An electrode comprising a support comprising a deposit disposed  
2     thereon, said deposit comprising a catalytically effective load of an electrocatalyst  
3     comprising an electrocatalytic active area at least in part comprising rod-shaped  
4     structures.

1           37.     The electrode of claim 36 wherein said rod-like structures are visible at  
2     a magnification of at least about x10k.

1           38.     The electrode of claims 36 and 37 wherein said deposit further  
2     comprises particles of said electrocatalyst comprising an outer surface, wherein said  
3     electrocatalytic active area comprises a majority of said outer surface of said particles.

1           39.     The electrode of claims 36-38 wherein said support has a surface area, and  
2     said deposit covers about 300 cm<sup>2</sup> or more of said surface area.

1           40.     The electrode of claims 36-39 wherein said catalyst comprises platinum.

1           41.     The electrode of claims 36-40 wherein, at a cell potential of about 0.6  
2     V, an MEA containing said electrode as a half cell operating as a cathode yields a  
3     power output of about 400 mA cm<sup>-2</sup> or greater.

1           42.     The electrode of claims 36-40 wherein, at a cell potential of about 0.6  
2     V, an MEA containing said electrode as a half cell operating as a cathode yields a  
3     power output of about 800 mA cm<sup>-2</sup> or greater.

1           43     The electrode of claims 36-40 wherein, at a cell potential of about 0.6

2 V, an MEA containing said electrode as a half cell operating as a cathode yields a  
3 power output of about 1000 mA cm<sup>-2</sup> or greater.

1 44. The electrode of claims 36-43 wherein said support comprises a  
2 membrane comprising a composite of polytetrafluoroethylene comprising impregnated  
3 ion exchange media, said composite comprising a thickness of about 1 μm.

1 45. A membrane electrode assembly comprising the support of any of claims  
2 18-44.

1 46. The electrode of any of claims 18-44 wherein  
2 said support has a surface area; and,  
3 substantially all of said surface area ionically communicates with an ionomeric  
4 membrane.

1 47. The electrode of claim 46 wherein said surface area is 300 cm<sup>2</sup> or  
2 greater.

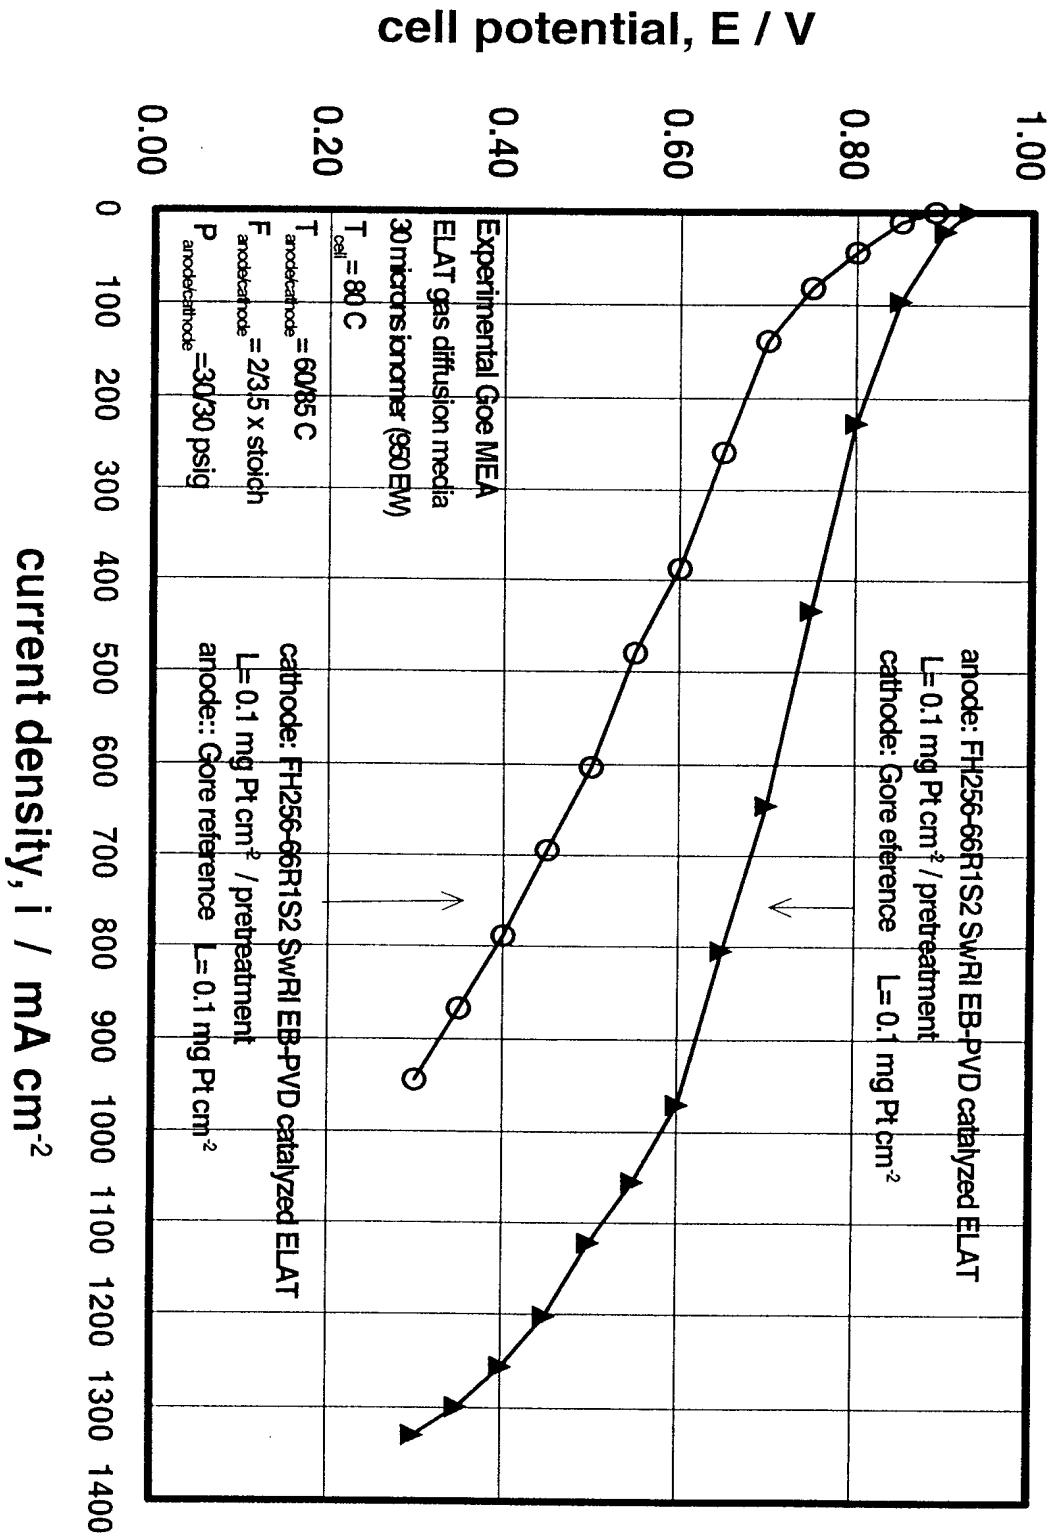


Figure 1



2/17

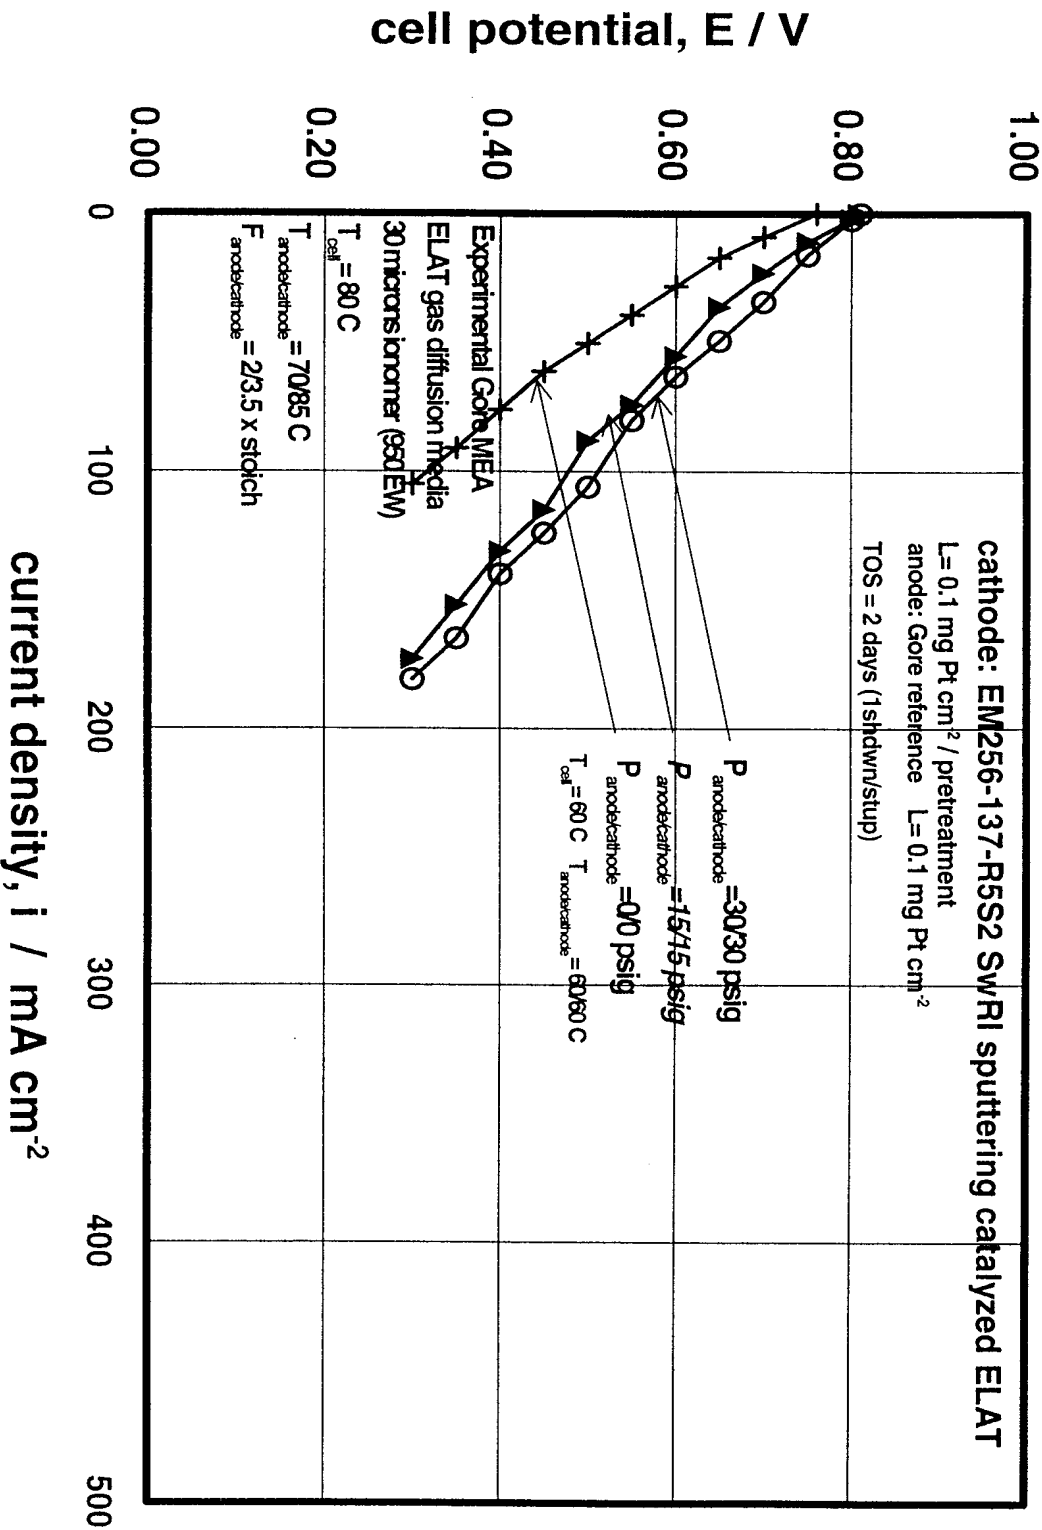


Figure 2

3/17

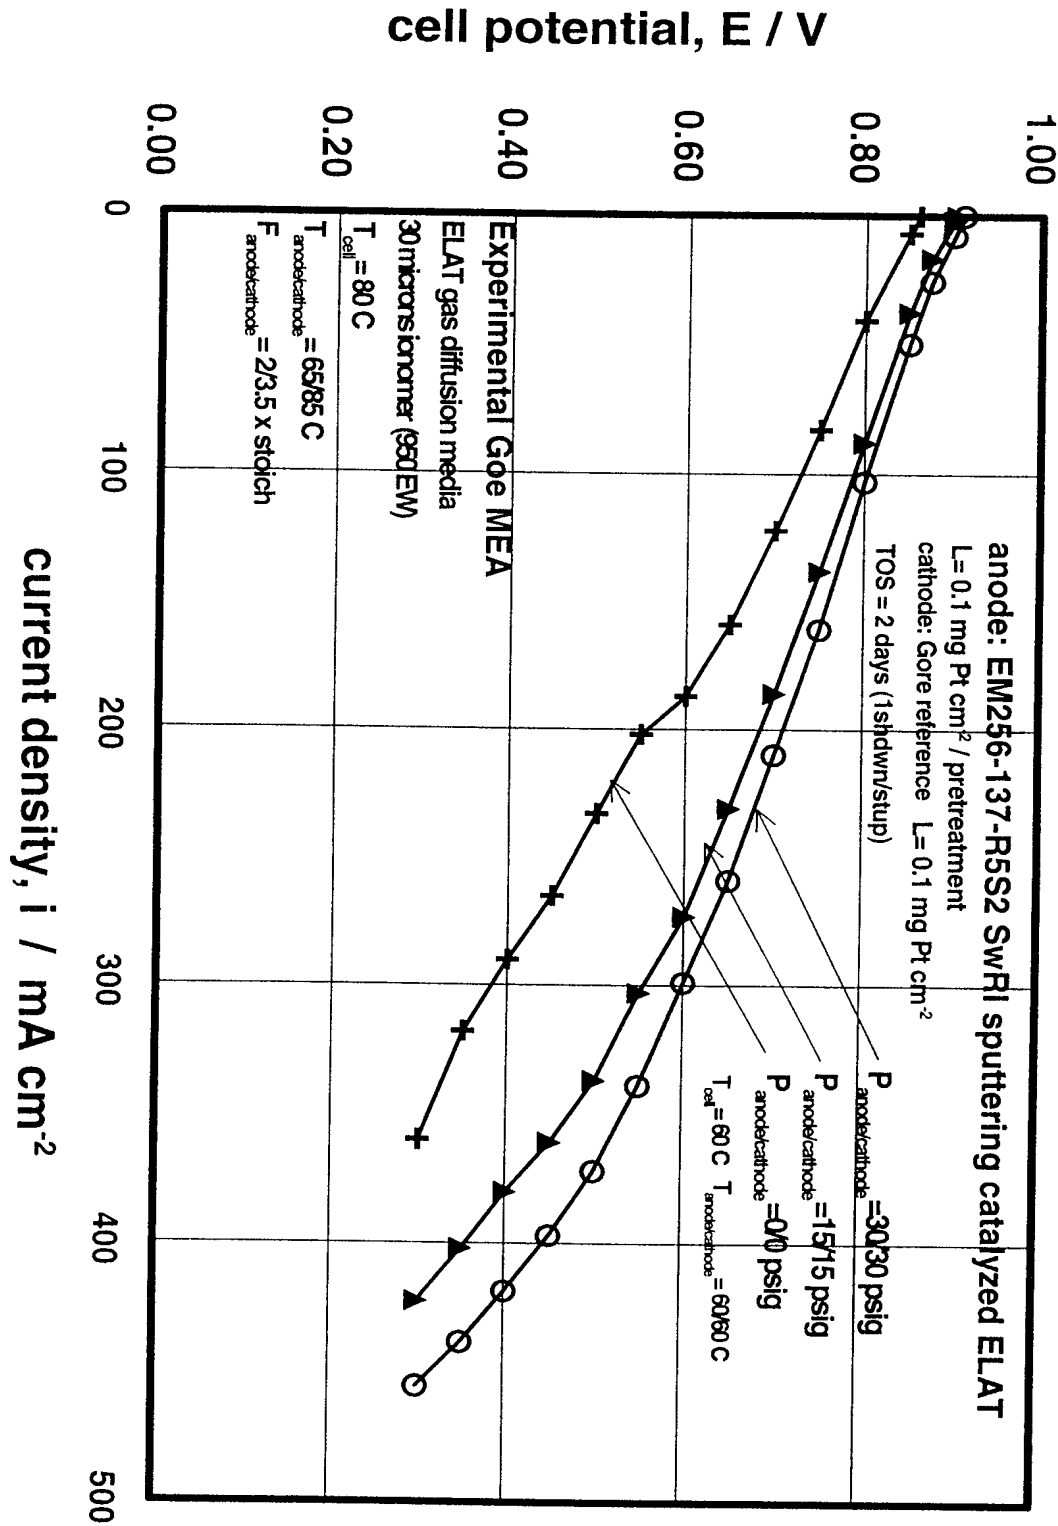


Figure 3

4/17

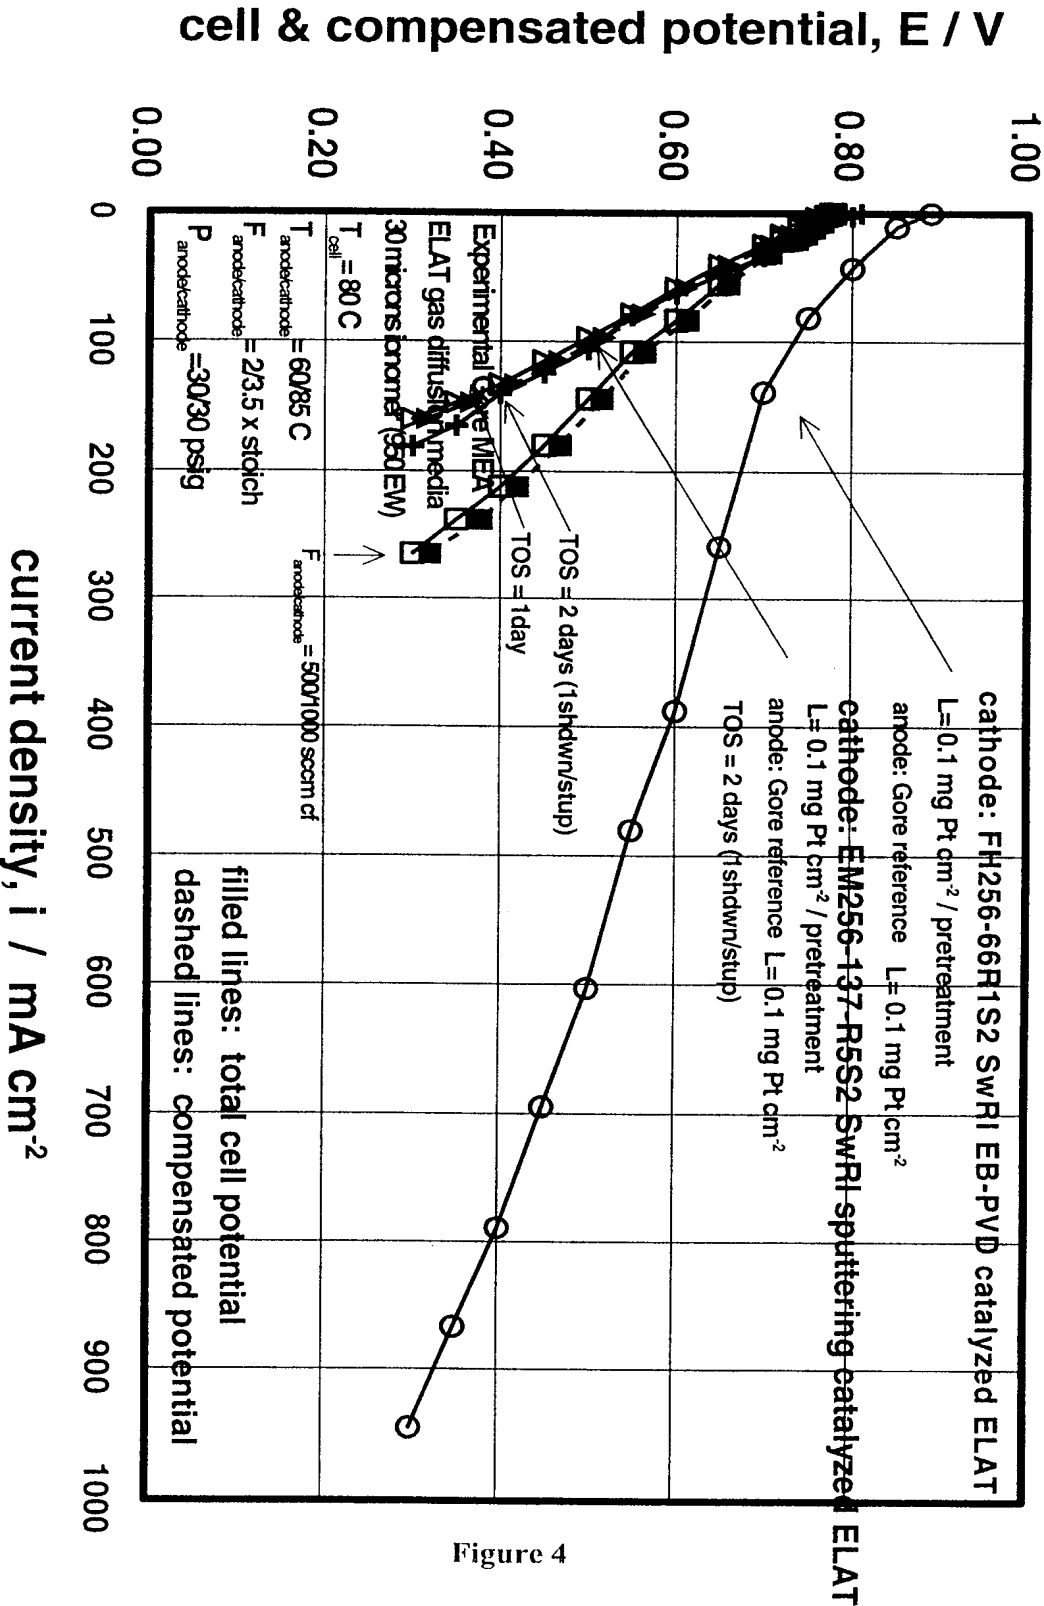


Figure 4

5/17

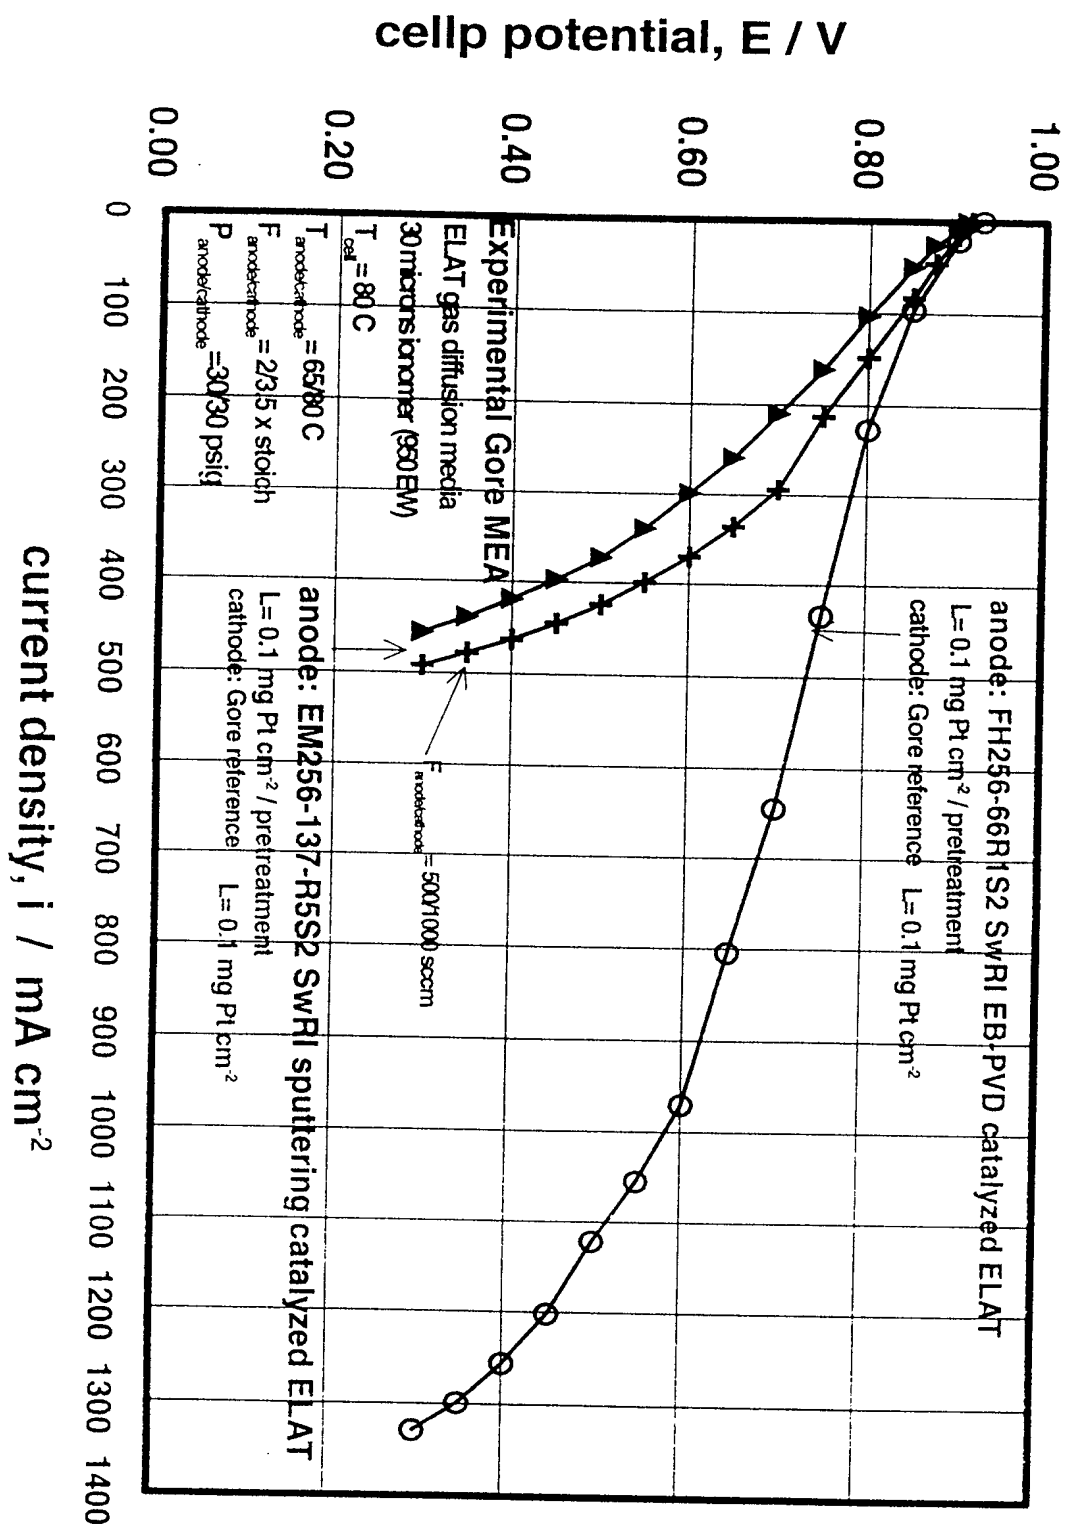


Figure 5

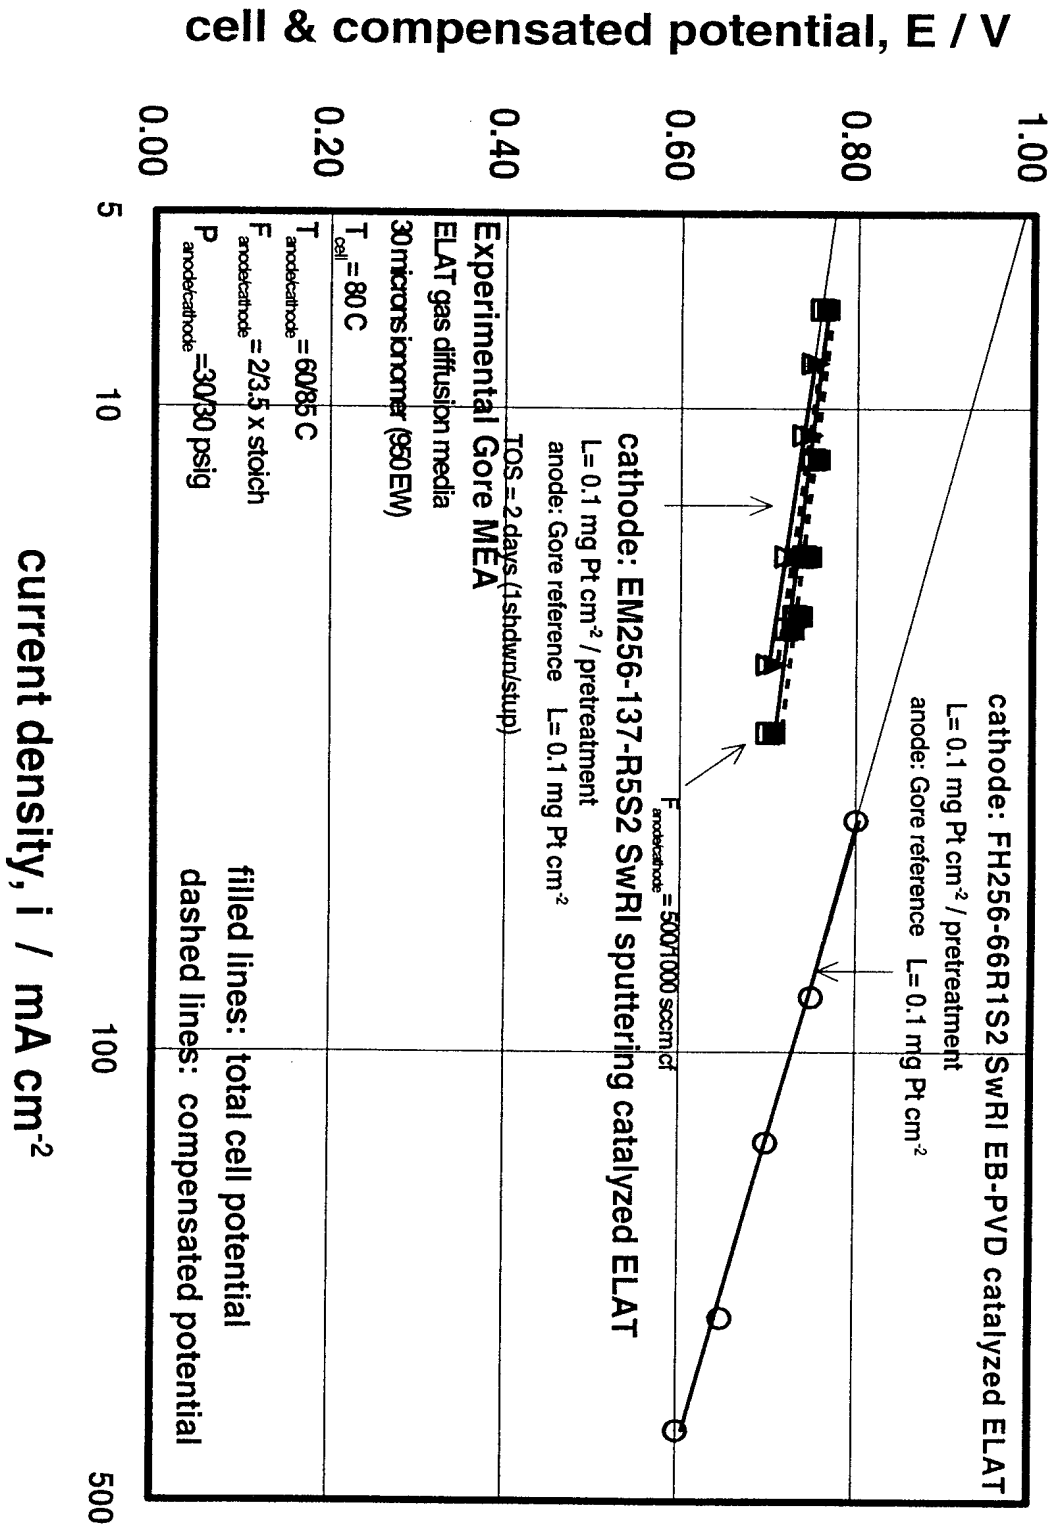


Figure 6

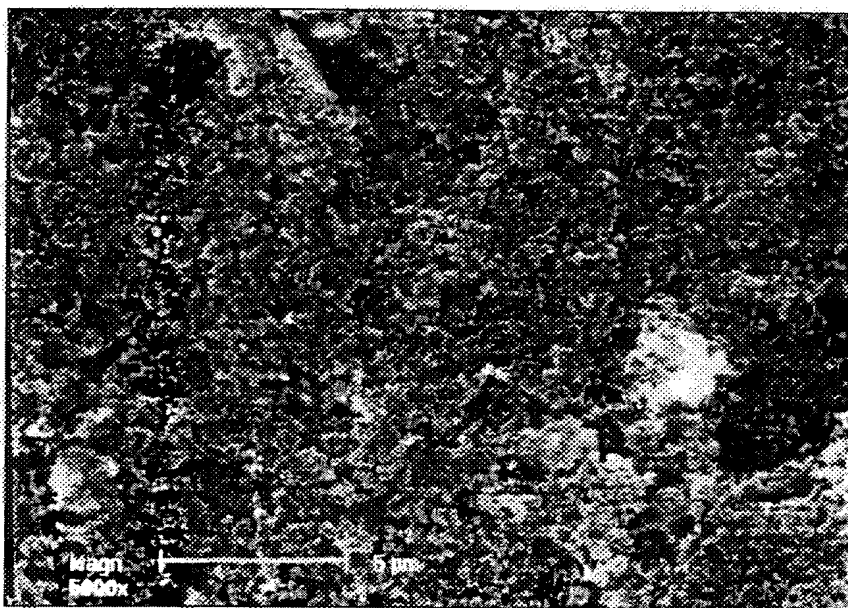


Figure 7

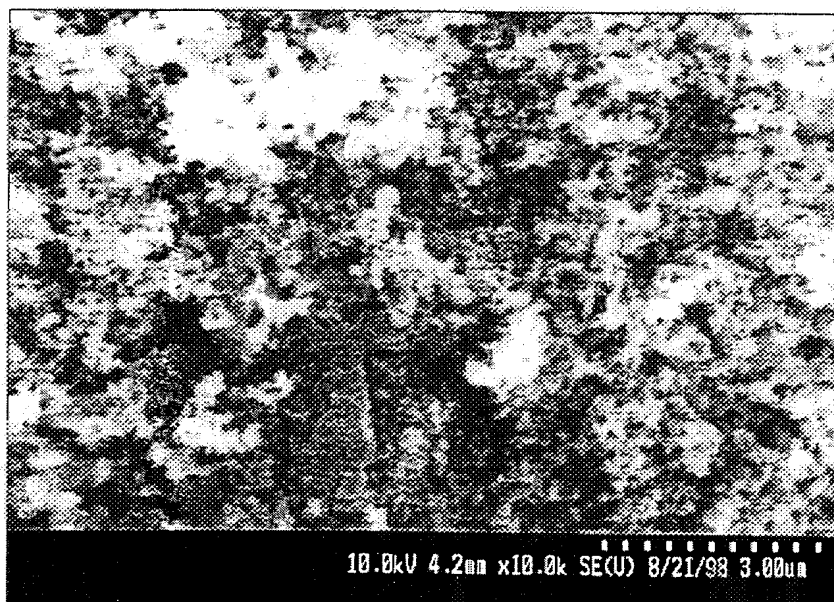
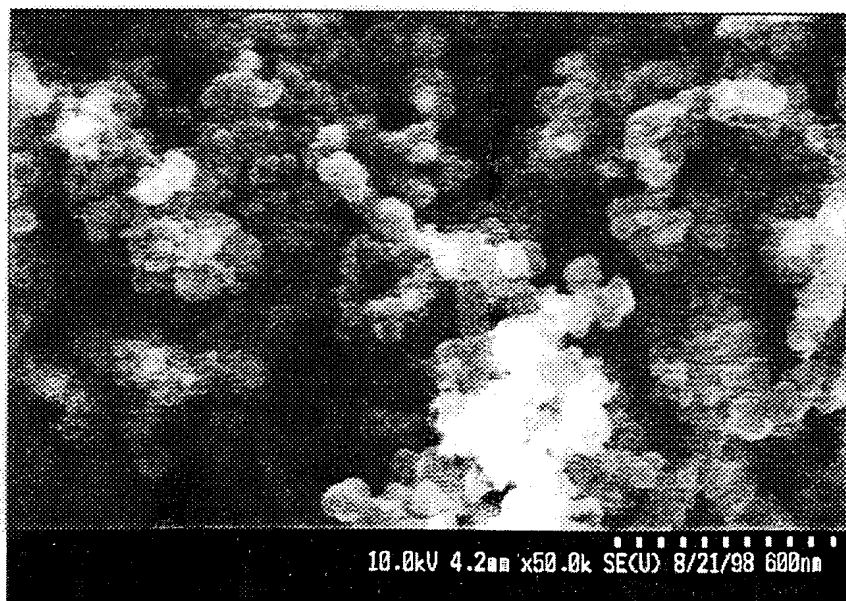


Figure 8



**Figure 9**

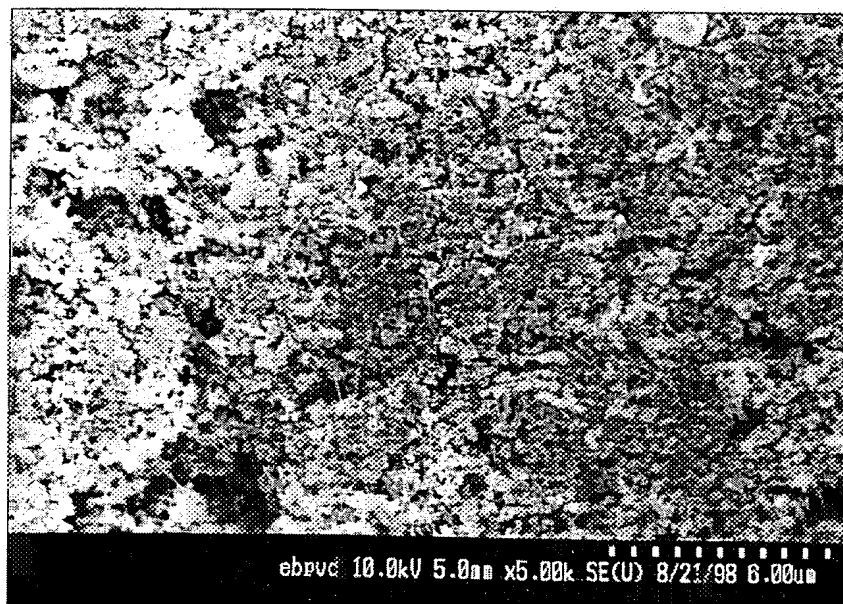


Figure 10

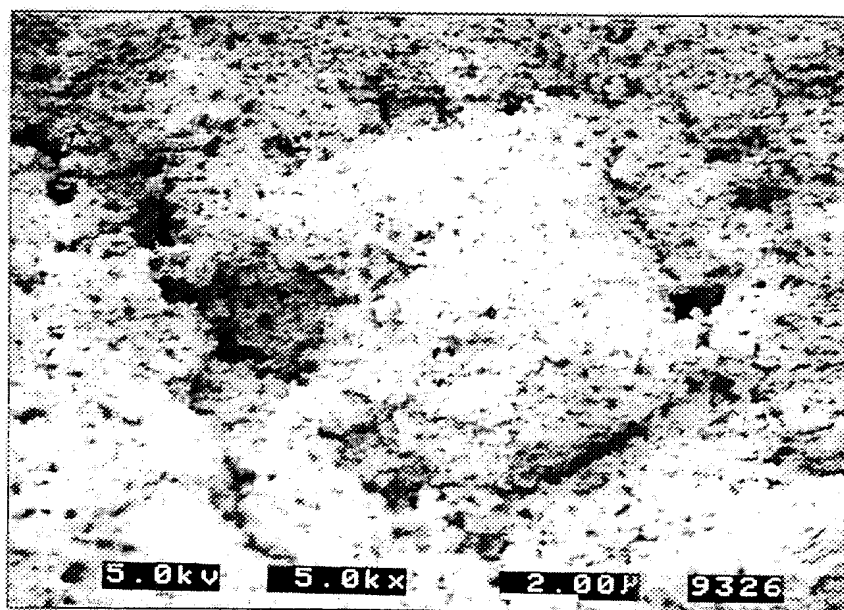
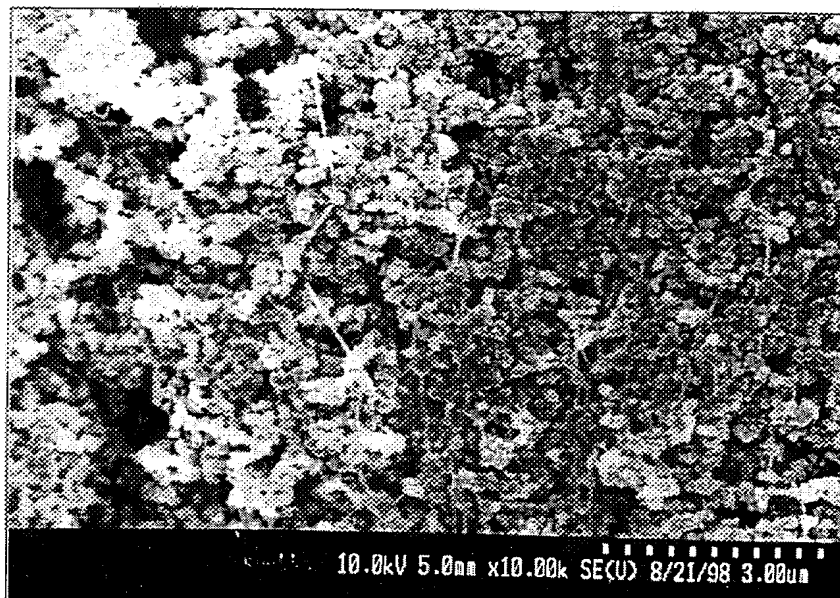


Figure 11

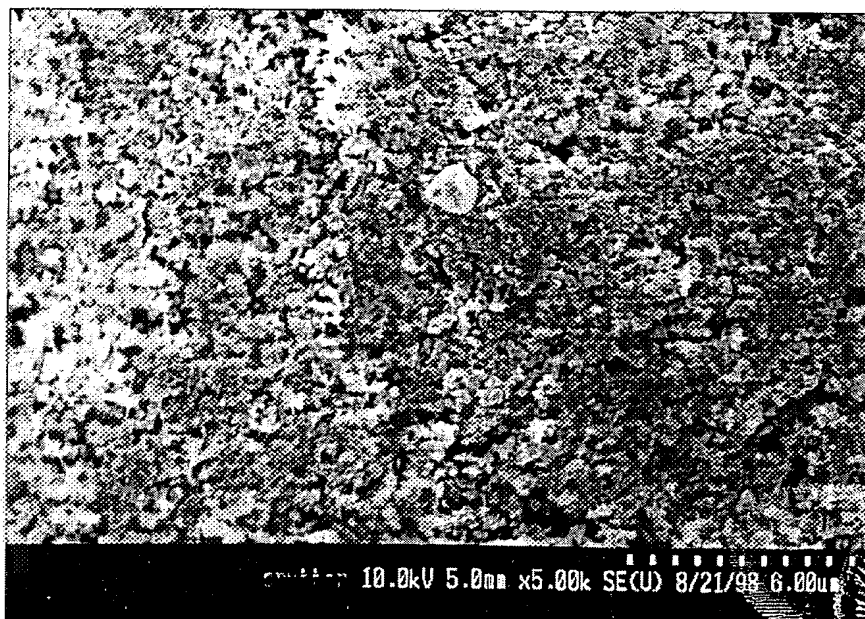




**Figure 12**



**Figure 13**



**Figure 14**



**Figure 15**

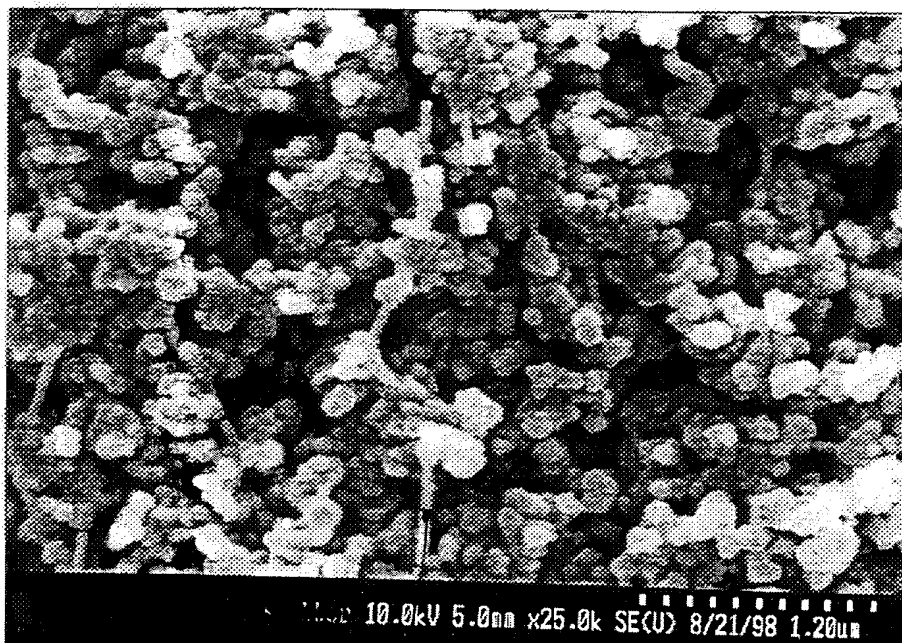


Figure 16

10

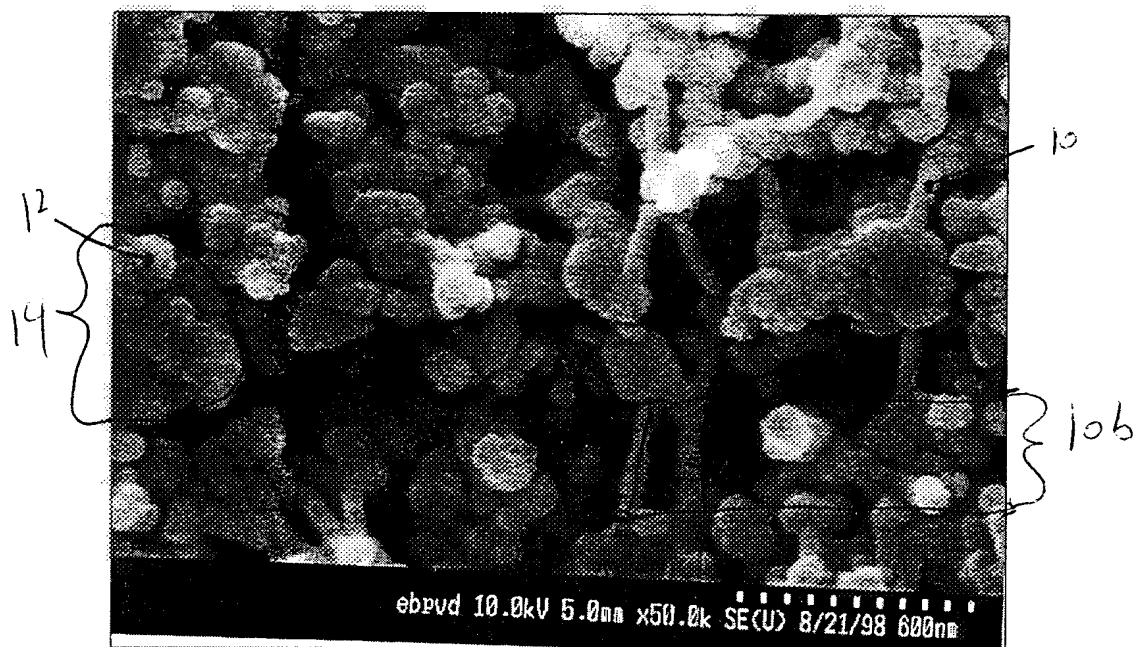
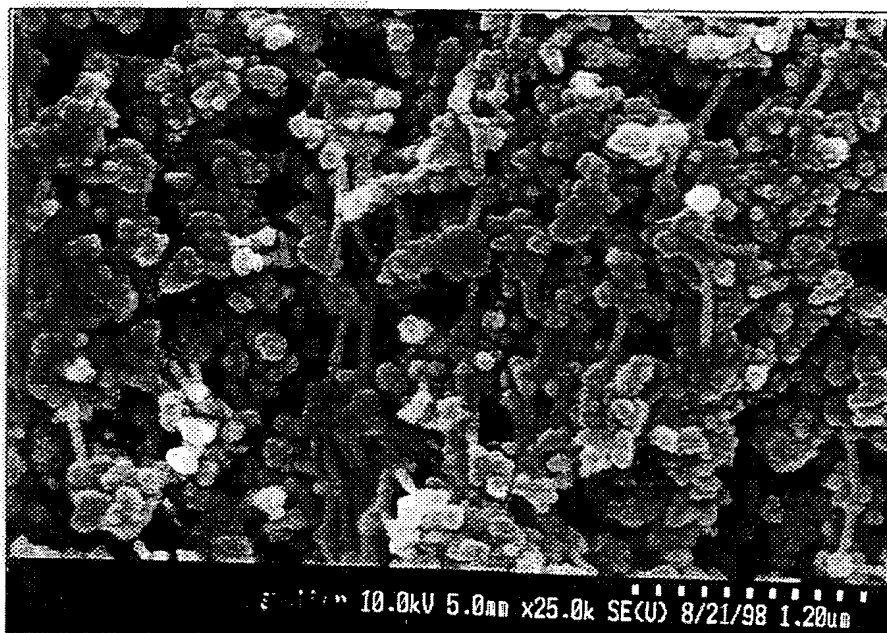
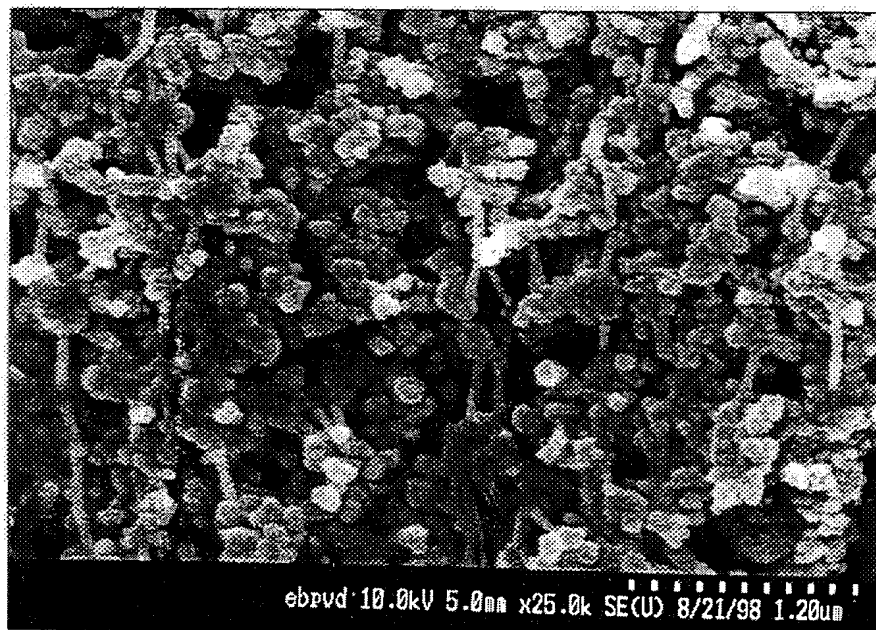
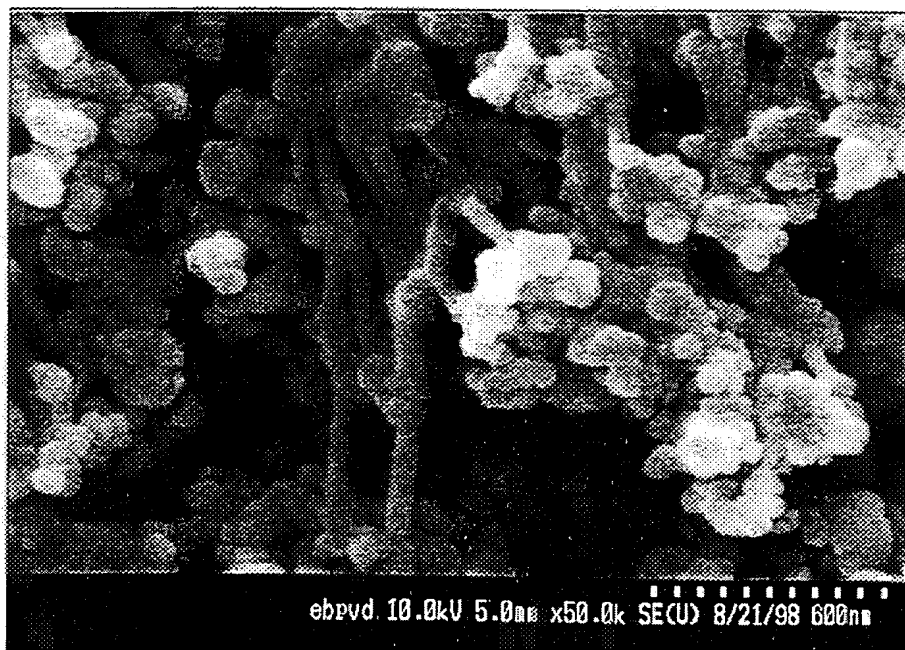




Figure 17

10a

**Figurem 18****Figure 19**



**Figure 20**

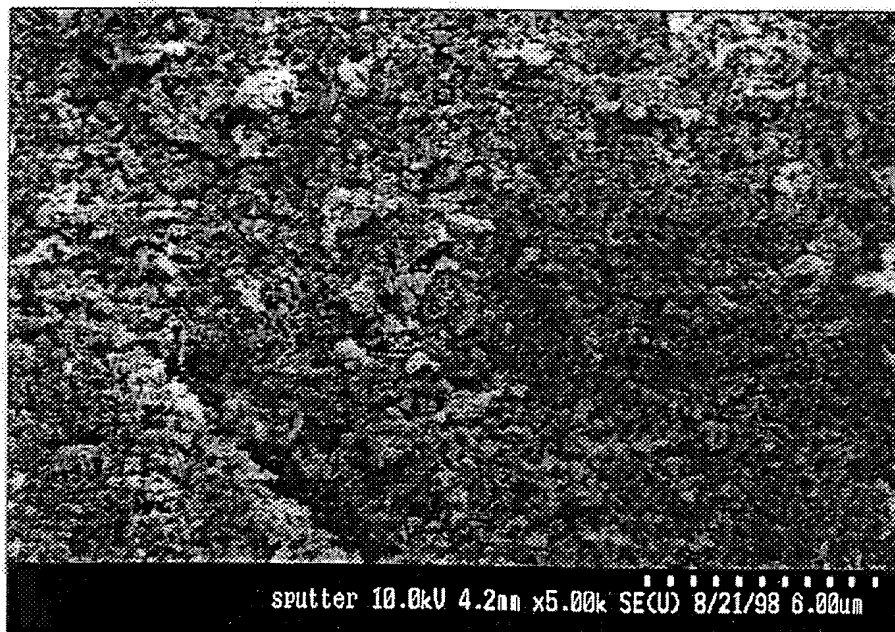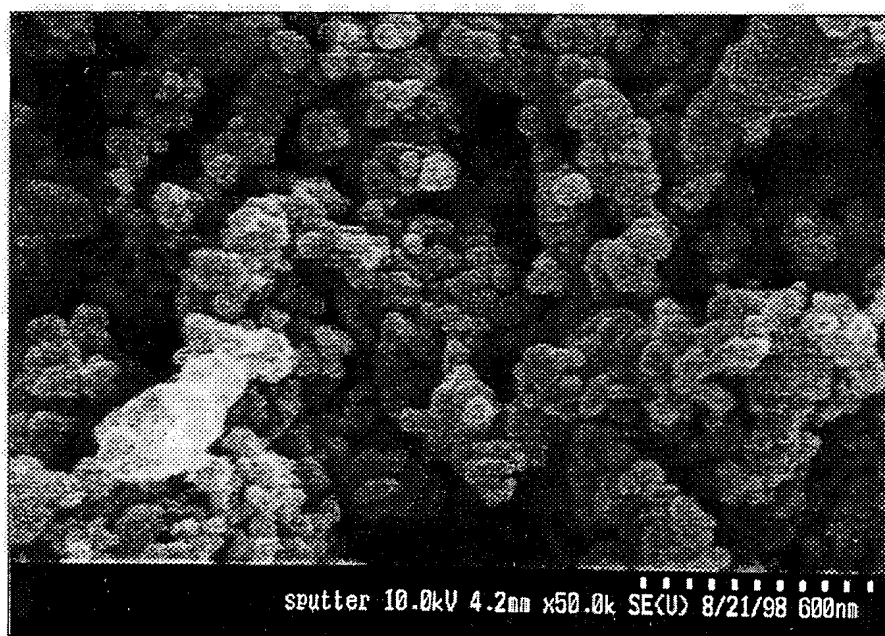**Figure 21****Figure 22**

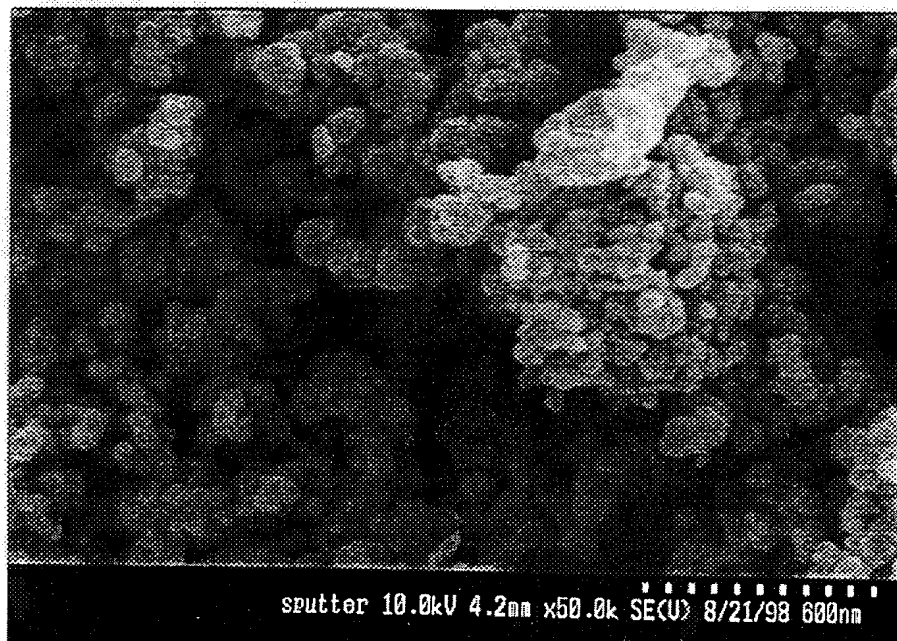


Figure 23



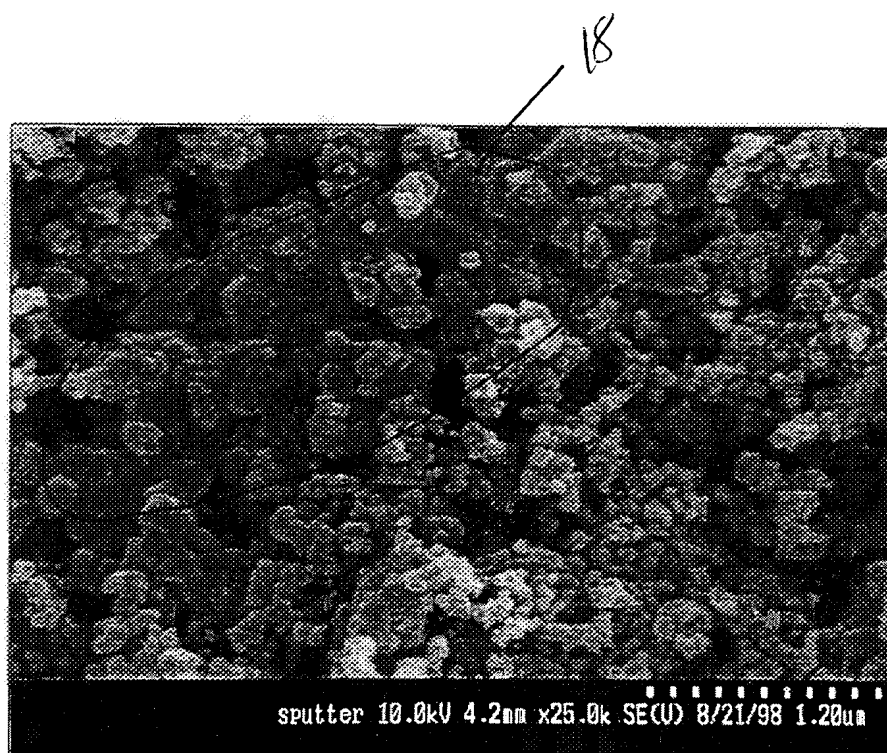


Figure 24



**Figure 25****Figure 26**

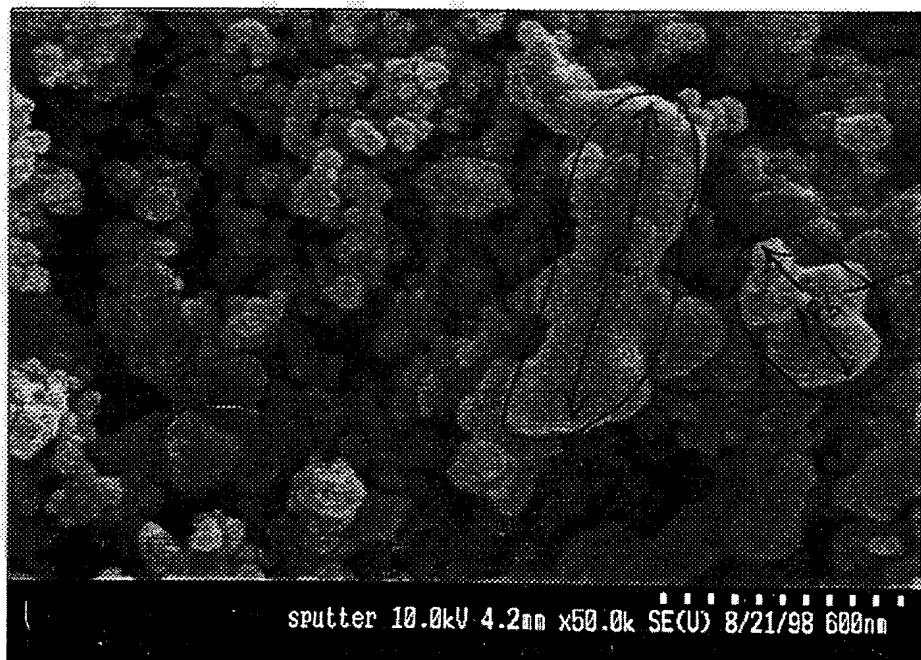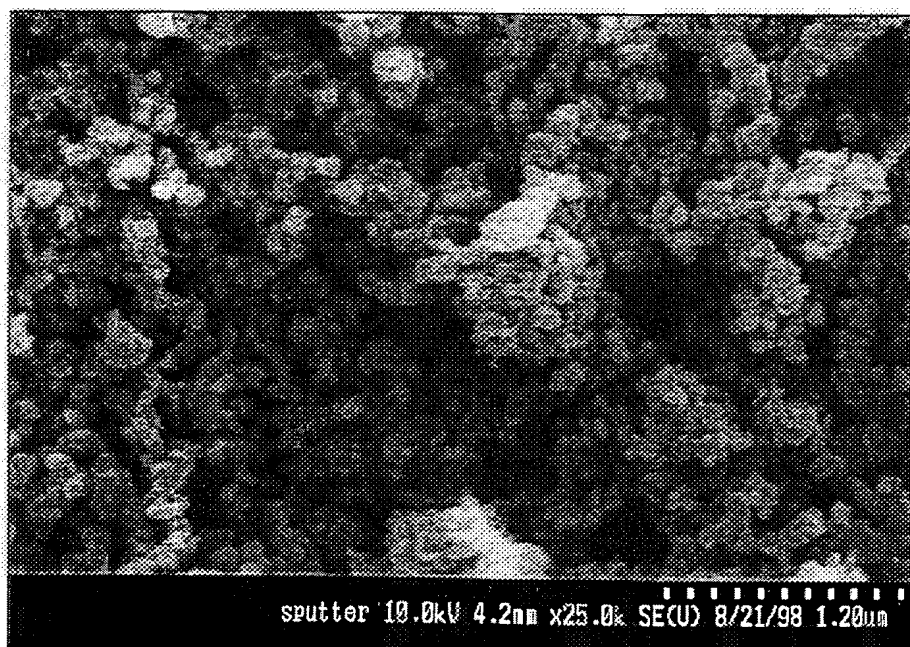

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/18938

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :C23C 16/26; H01M 8/10; B05D 5/12

US CL :427/115,250,294; 204/294; 429/44

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 427/115,250, 252,229,294; 204/283,294,295,290R; 429/40,44

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
N/A

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
N/A

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X -- Y	US 5,750,013 A (LIN) 12 May 1998, abstract and col. 2, Line 28 - col. 5, Line 55.	1-7,12-24 ----- 8-10,25-42
X -- Y	US 5,518,831 A (TOU ET AL.) 21 May 1996, col. 7, Line 55 - col. 10, Line 65.	1-30 ----- 31-42
A	US 4,460,660 A (KUJAS) 17 July 1984, entire document.	1-42



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* & * document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 NOVEMBER 1998

Date of mailing of the international search report

27 NOV 1998

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

BRIAN TALBOT

Telephone No. (703) 305-3775